TIMBER GLOW®

Introducing Timber Glow Lucifer Lighting's new premier wooden baffle offering for Fraxion® downlights. Offered in Maple and Walnut factory supplied wood. For all other hard wood selections, we will accept wood directly from clients for in-house fabrication.


Baffles must be finished with a moisture resistant sealer within two weeks of receipt at jobsite.



COMPATIBLE WOODS

To ensure proper machining and performance, please refer to the checklist below for wood compatibility requirements.

1. Ensure hard wood is >900 on the Janka scale.
2. Wood must have a straight open or closed grain structure.
3. No endangered woods can be used.
4. Moisture content must be less than 8%.

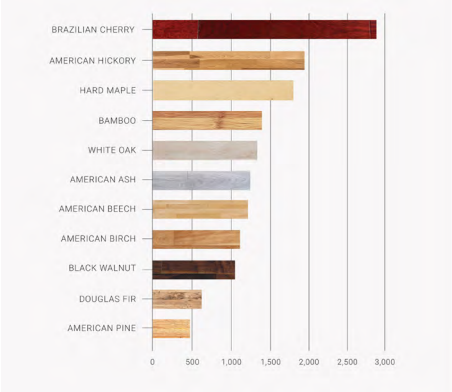

JANKA SCALE

The wood supplied by the customer needs to be 8/4 (2") minimum thickness, 4-3/4" wide, and 4-3/4" long per baffle. It is important to provide 10% extra material for fallout.

OFFERING

Timber Glow™ wooden baffles will be available for Fraxion®3 and Fraxion®4 fixtures for dry and damp locations only. Options include round and square baffle, deep or shallow regress , and fixed or adjustable configurations.



WALNUT



MAPLE

©2026 Lucifer Lighting Company
As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.
[PH] +1-210-227-7329
[FAX] +1-210-227-4967
[DATE OF REV: 07272026]

TIMBER GLOW

FINISHING DETAILS

- Baffles do NOT ship pre-finished.
- We recommend the finish to match the corresponding wood ceiling.
- Polyurethane products are acceptable.
- We recommend a durable moisture resistant clean coat lacquer.
- Wood finishing oils, such as Danish or teak oil, can be used, noting that the color of the wood may be affected.

LEAD TIMES

	0-20 UNITS	21-50 UNITS	51+ UNITS
CLIENT SUPPLIED WOOD (FROM FACTORY RECEIPT OF WOOD)	4 WEEKS	5 WEEKS	CONSULT FACTORY
LUCIFER LIGHTING SUPPLIED WOOD (POST ORDER RELEASE)	4 WEEKS	5 WEEKS	CONSULT FACTORY

©2026 Lucifer Lighting Company
As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.
[PH] +1-210-227-7329
[FAX] +1-210-227-4967