


SQUILINDER® FIXED SUSPENDED MOUNT

A modern update to a timeless form, this award-winning, fresh-faced classic offers sleek geometry, field-changeable optics, and endless adjustability.

| | |
|---------------|-------|
| PROJECT NAME: | TYPE: |
|---------------|-------|

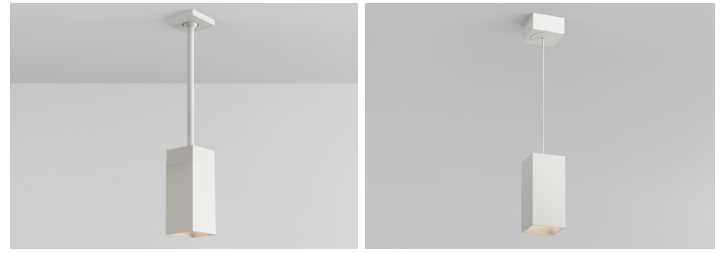

ORDERING INFORMATION - SQUILINDER




Quick Ship Product. All rough in components ship within 10 days up to quantities of 100.



JA8-2019 COMPLIANCE INDICATED BY SHADING

| SQUILINDER | LENGTH | FIXTURE | RATING | SQUILINDER FINISH | BAFFLE FINISH | LUMEN PACKAGE | OCT | OPTIC | DRIVER | EFFECTS DEVICE | MOUNTING |
|--|--|---|------------|--|--|---|--|--|---|---|--|
| | | | 1 | | | | | | | | |
| Dropkit® STEM ASSEMBLY SD2 3.13" | 043 2" - 43" Mechanical Dropkit Stem | FB Fixed Body WW Wallwash Unibody | 1 Dry/Damp | WH White BK Black AB Architectural Bronze* AG Satin Silver* CF Custom Finish* | WH White BK Black AB Architectural Bronze* AG Satin Silver* CF Custom Finish* | STATIC WHITE 80C12A 80+ CRI, FB Dlvd. Lumens - 758 WW Dlvd. Lumens - 923 80C19A 80+ CRI FB Dlvd. Lumens - 1169 WW Dlvd. Lumens - 1424 80C25A 80+ CRI FB Dlvd. Lumens - 1552 WW Dlvd. Lumens - 1769 90C10A 90+ CRI, FB Dlvd. Lumens - 649 WW Dlvd. Lumens - 791 90C15A 90+ CRI FB Dlvd. Lumens - 1001 WW Dlvd. Lumens - 1220 90C20A 90+ CRI FB Dlvd. Lumens - 1330 WW Dlvd. Lumens - 1516 | 22 2200K* *Only available for 90+ CRI 27 2700K 30 3000K 35 3500K 40 4000K | 10 10°** *Only available for 80C12A, 90C10A, and 97C09A. Not available for 2200K 15 15° 25 25° 40 40° 60 60° WW Wall-wash Optic* *Required for Wallwash fixtures) | INTEGRAL CA2 120-277V 0-10V Analog CE2 120V Electronic ELV Forward / Reverse Phase REMOTE (120V) TR2 Philips, 2% Leading/Trailing/Triac* *Only available for 80C19A, 90C15A, and 97C14A) L23 Lutron, Hi-Lume 1% 2-Wire REMOTE (120-277V) LH1 Lutron, Hi-Lume Ecosystem 1% Fade to Black LP1 Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black AN4 Philips Titanium 1% 0-10V, LOG LN2 Philips Titanium 1% 0-10V, LIN EA2 eldoLED, SOLOdrive 0.1% 0-10V, LOG LA2 eldoLED, SOLOdrive 0.1% 0-10V, LIN ED1 eldoLED, SOLOdrive 0.1% DALI, LOG LD1 eldoLED, SOLOdrive 0.1% DALI, LIN | STANDARD EFFECTS DEVICE 40 Soft Focus Lens WW Wallwash Lens* *Required for Wallwash fixtures) 00 No Lens* *Standard for 10° optic. Not available for Warm Dim) ALTERNATE EFFECTS DEVICE 30 Clear Glass Lens* *Not available for Warm Dim) 50 Frosted Glass Lens 60 Frosted Soft Focus Lens 70 Frosted Linear Spread Lens | ROUGH-IN JBMP 4" Sq. or 4/0 Junction Box Mounting Plate FINISH OUT CMJB 1/2" and 3/4" Conduit Ceiling Mount Junction Box* *Quick Ship Product for WH and BK finishes only) |
| | 086 45" - 86" Mechanical Dropkit Stem | | | | | | | | | | |
| | 129 88" - 129" Mechanical Dropkit Stem | | | | | | | | | | |
| | 172 131" - 172" Mechanical Dropkit Stem *All lengths are field cuttable) | | | | | | | | | | |
| | | | | | | | | | | | |
| PENDANT SP2 3.13" | XXXB Black Cable XXXW White Cable Specify cable length in whole inches [Max 180] ex. specify 006B for a 6 inch black cable* *Cable is field cuttable) | FB Fixed Body | 1 Dry/Damp | WH White BK Black AB Architectural Bronze* AG Satin Silver* CF Custom Finish* | WH White BK Black AB Architectural Bronze* AG Satin Silver* CF Custom Finish* | WARM DIM 90W11A 90+ CRI, Incandescent Profile FB Dlvd. Lumens - 847 WW Dlvd. Lumens - 761 90W13A 90+ CRI, Halogen Profile FB Dlvd. Lumens - 892 WW Dlvd. Lumens - 991 *SEE PAGE 3 FOR DETAILED WARM DIM PROFILE COMPARISON. *ALL DELIVERED LUMEN OUTPUTS AND T24 COMPLIANCE REFLECT 3000K PAIRED WITH 40° OPTIC AND SOFT FOCUS LENS. REFERENCE PAGE 3 FOR ADDITIONAL T24 COMPLIANT CONFIGURATIONS. | WL 2700K - 1800K WD 3200K - 1800K | 25 25° 40 40° 60 60° WW Wall-wash Optic* *Required for Wallwash fixtures) | AN4 Philips Titanium 1% 0-10V, LOG LN2 Philips Titanium 1% 0-10V, LIN EA2 eldoLED, SOLOdrive 0.1% 0-10V, LOG LA2 eldoLED, SOLOdrive 0.1% 0-10V, LIN ED1 eldoLED, SOLOdrive 0.1% DALI, LOG LD1 eldoLED, SOLOdrive 0.1% DALI, LIN | *Not available for Warm Dim) 50 Frosted Glass Lens 60 Frosted Soft Focus Lens 70 Frosted Linear Spread Lens | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

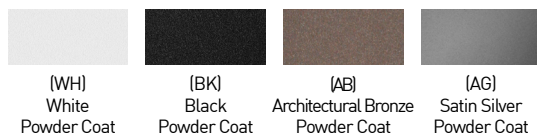

PART NUMBER NOTES

- SD2 ships as e.g., SQ2-AD1-WHBK-90C20A2-30CA240
- Stem Assembly ships as SQ2-DK-(length)-(finish)
- SP2 ships as e.g., SP2-1801-WHBK-90C20A2-30RMT40W
- Remote driver ships as e.g., PS-RMT-90C20A-1L23
- JBMP ships as SQ2-JBMP
- CMJB ships as SQ2-CMJB-(finish)

SQUILINDER FIXED SUSPENDED MOUNT

ACCESSORIES

ALTERNATE BAFFLE AND EFFECTS DEVICE

Includes baffle with sealed lens. Must specify baffle finish.

RBA-SQ2--CGL-2** Clear Glass Lens *

*(Not available for Warm Dim)

RBA-SQ2--SFL-2** Soft Focus Lens

RBA-SQ2--FGL-2** Frosted Glass Lens

RBA-SQ2--FSFL-2** Frosted Soft Focus Lens

RBA-SQ2--FLSL-2** Frosted Linear Spread Lens

** Baffle finish: Specify **WH** for white, **BK** for black, **AG** for satin silver or **AB** for architectural bronze.

REPLACEMENT OPTICS

Interchangeable optics accessible by removing baffle.

RO-70-15-1 15° optic *

*(Not available for Warm Dim)

RO-70-25-1 25° optic

RO-70-40-1 40° optic

RO-70-60-1 60° optic

REPLACEMENT SUCTION TOOL

Included with each order (1 per 10 fixtures).

CY-SQ-TOOL-SUCTION Baffle assembly removal tool

EMERGENCY LIGHTING - REMOTE MOUNT ONLY

EMB-S-20/25-120/277-LEDX 20/25 watt max capacity, 120 or 277 VAC 60Hz

EMB-S-100-120-LEDX 100 watt max capacity, 120 VAC 60Hz

EMB-S-100-277-LEDX 100 watt max capacity, 277 VAC 60Hz

EMB-S-250-120/277-LEDX 250 watt max capacity, 120 or 277 VAC 60Hz

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

SQUILINDER FIXED SUSPENDED MOUNT

STATIC WHITE PERFORMANCE - 3000K - SOFT FOCUS LENS

| LUMEN PACKAGE | WATTAGE | 10° OPTIC NO SOFT FOCUS LENS | | 15° OPTIC SOFT FOCUS LENS | | 20° OPTIC SOFT FOCUS LENS | | 40° OPTIC SOFT FOCUS LENS | | 60° OPTIC SOFT FOCUS LENS | | WW OPTIC WALLWASH LENS | |
|---------------|---------|---------------------------------|----------|------------------------------|-----|------------------------------|-----|------------------------------|-----|------------------------------|-----|---------------------------|-----|
| | | DELIVERED | LPW | DELIVERED | LPW | DELIVERED | LPW | DELIVERED | LPW | DELIVERED | LPW | DELIVERED | LPW |
| 80C12A | 10 | 960 | 56 (17W) | 831 | 84 | 794 | 80 | 758 | 77 | 807 | 82 | 923 | 92 |
| 80C19A | 17 | - | - | 1282 | 78 | 1225 | 75 | 1169 | 71 | 1244 | 76 | 1424 | 84 |
| 80C25A | 24 | - | - | 1702 | 73 | 1627 | 70 | 1552 | 66 | 1652 | 71 | 1769 | 74 |
| 90C10A | 10 | 814 | 47 (17W) | 712 | 72 | 681 | 69 | 649 | 66 | 691 | 70 | 791 | 79 |
| 90C15A | 17 | - | - | 1098 | 67 | 1050 | 64 | 1001 | 61 | 1066 | 65 | 1220 | 72 |
| 90C20A | 24 | - | - | 1459 | 62 | 1394 | 60 | 1330 | 57 | 1416 | 61 | 1516 | 63 |
| 97C09A | 10 | 745 | 43 (17W) | 637 | 64 | 609 | 62 | 581 | 59 | 618 | 63 | 708 | 71 |
| 97C14A | 17 | - | - | 983 | 60 | 939 | 57 | 896 | 55 | 954 | 58 | 906 | 53 |
| 97C19A | 24 | - | - | 1305 | 56 | 1247 | 53 | 1190 | 51 | 1267 | 54 | 1169 | 49 |
| 90W13A | 16 | - | - | - | - | 922 | 58 | 847 | 53 | 909 | 57 | 761 | 45 |
| 90W13A | 16 | - | - | - | - | 971 | 60 | 892 | 55 | 957 | 59 | 991 | 58 |



JA8-2019 INDICATED BY SHADING


| OUTPUT MULTIPLIER | |
|--|-----------|
| CCT | CCT SCALE |
| 2200K (Consult factory for JA8 details) | 0.800 |
| 2700K | 0.957 |
| 3000K | 1.000 |
| 3500K | 1.019 |
| 4000K | 1.030 |

| LIGHT LOSS FACTOR MULTIPLIER | |
|------------------------------|------|
| No Lens | |
| CGL | 1.05 |
| SFL | 1.00 |
| FGL | 0.90 |
| FSFL | 0.87 |
| FLSL | 0.83 |
| HCL | 0.65 |

WARM DIM PERFORMANCE - SOFT FOCUS LENS - 40° OPTIC


WARM DIM TO MIRROR HALOGEN DIMMING PROFILE

| 90W13A 3200K - 1800K | Full on 100% | Dimmed to 80% | Dimmed to 70% | Dimmed to 50% | Dimmed to 20% | Dimmed to 10% | Dimmed to 2% |
|-------------------------|-----------------|------------------|------------------|------------------|------------------|------------------|-----------------|
| CCT (K) | 3200 | 3150 | 3100 | 3000 | 2700 | 2200 | 1800 |
| Light Output (Lm) | 892 | 714 | 624 | 446 | 178 | 89 | 18 |
| Power (W) | 16 | 13 | 11 | 8 | 3 | 1.7 | 0.3 |
| Efficacy (LPW) | 55 | 55 | 55 | 55 | 55 | 55 | 55 |

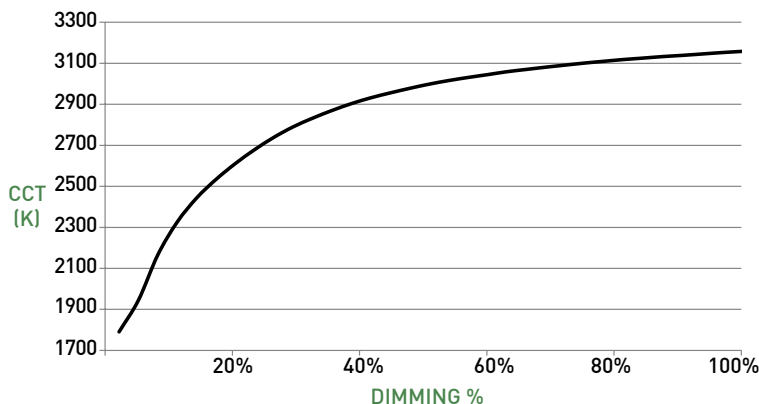

WARM DIM TO MIRROR INCANDESCENT DIMMING PROFILE

| 90W11A 2700K - 1800K | Full on 100% | Dimmed to 80% | Dimmed to 70% | Dimmed to 50% | Dimmed to 20% | Dimmed to 10% | Dimmed to 2% |
|-------------------------|-----------------|------------------|------------------|------------------|------------------|------------------|-----------------|
| CCT (K) | 2700 | 2650 | 2620 | 2520 | 2180 | 1950 | 1800 |
| Light Output (Lm) | 847 | 678 | 591 | 423 | 169 | 85 | 17 |
| Power (W) | 16 | 13 | 11 | 8 | 3 | 1.7 | 0.3 |
| Efficacy (LPW) | 53 | 53 | 53 | 53 | 53 | 53 | 53 |

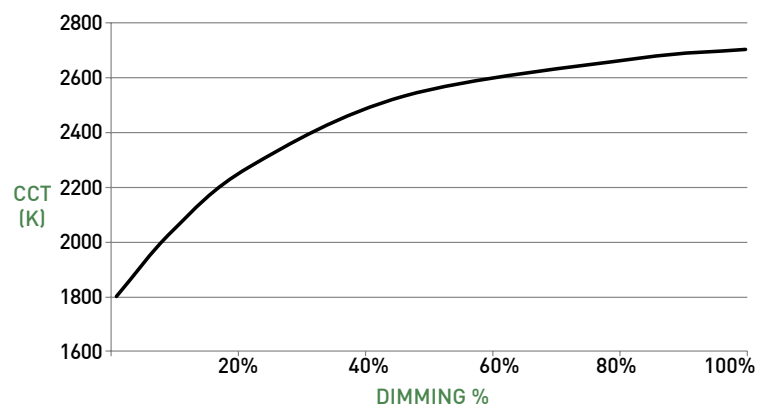


SQUILINDER FIXED SUSPENDED MOUNT


Dropkit STEM ASSEMBLY

- A LUMINAIRE**
Machined body with integral heat sink and LED. Power supply may be integral or remote mount.
- B FIXED BODY OPTICS**
Field-changeable optics available in 10°, 15°, 25°, 40° and 60° beams.
- WALLWASH OPTIC**
Precision tuned optic provides uniform wallwashing effect.
- C FIXED BODY EFFECTS DEVICE**
Soft focus lens or no lens standard; lenses sealed in place. Fixture can accept 1 effects device.
- WALLWASH EFFECTS DEVICE**
Wallwash lens is sealed in place. Fixture can accept 1 effects device.
- D BAFFLE**
Baffle minimizes aperture glare and conceals view into fixture. Suction tool provided for removal of baffle.
- E Dropkit**
 - Field cuttable rigid stem for suspending fixture at desired height. Provides stable base to allow preferred fixture tilt, while maintaining vertical stem position.
 - Ball joint allows up to 45° tilt for sloped ceilings and can be locked once stem is positioned vertically.
 - Four 43" sections available; 172" maximum standard length.
 - Length adjustment occurs in lower canopy.
 - Wiring for stem assembly provided by others.




DIMENSIONS / DRAWINGS

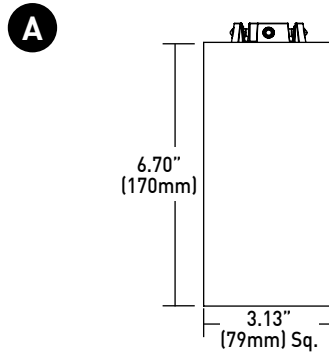

FIXED BODY



WALLWASH UNIBODY

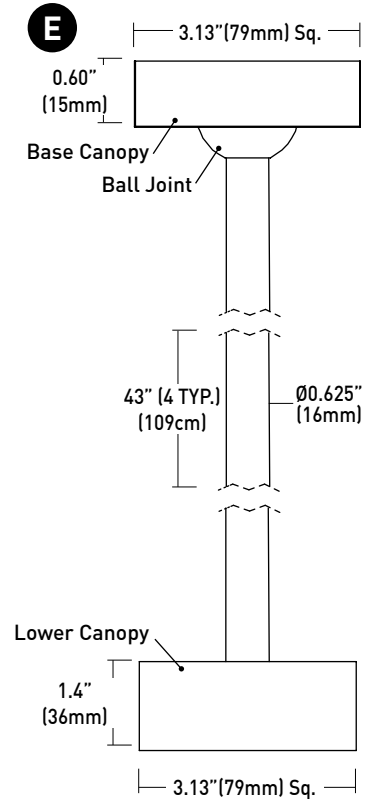



SQUILINDER FIXED SUSPENDED MOUNT

PENDANT





- F CANOPY**
Machined 1.60" (41mm) canopy accommodates flat and slope ceiling conditions. Conceals hidden mounting hardware. Available with integral or remote driver.
- G CABLE**
Black and white wiring harness available; up to 180.0" length; cable may be cut in field.
- H LUMINAIRE**
Machined body with integral heat sink and LED.
- I STANDARD OPTICS**
Proprietary optics available in 10°, 15°, 25°, 40° & 60° beams.
- J EFFECTS DEVICE**
Soft focus lens or no lens standard; lenses sealed in place. Fixture can accept 1 effects device.
- K BAFFLE**
Baffle minimizes aperture glare and conceals view into fixture. Suction tool provided for removal of baffle.

DIMENSIONS / DRAWINGS

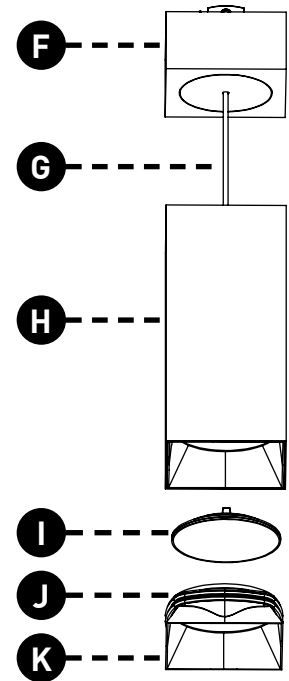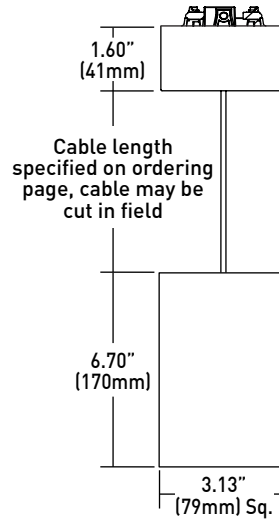

Dropkit STEM AND PENDANT MOUNTING

- L JBMP**
Mounting plate (concealed) for standard 4" square or 4" 4/0 j-box. To be installed during rough-in prior to substrate. Fixture to mount flush with minimalist transition to ceiling.
- M SMK3 (Only available with Pendant)**
Surface mount kit includes mounting plate and 4" concealer plate that installs between fixture and standard 3" 3/0 j-box for existing applications where standard j-box cutout is to be concealed.
- N SMK4 (Only available with Pendant)**
Surface mount kit includes mounting plate and 5" concealer plate that installs between fixture and standard 4" 4/0 j-box for existing applications where standard j-box cutout is to be concealed.
- O CMJB**
Ceiling mount junction box perfectly matches the squilinder profile for a continuous, integrated look where exposed ceiling mount junction box and conduit applications apply. For use with 1/2" and 3/4" EMT conduit only. Features three conduit entrances at 12, 3, and 6 o'clock plus one conduit knockout on top. Painted finishes only. Blank off plugs included.

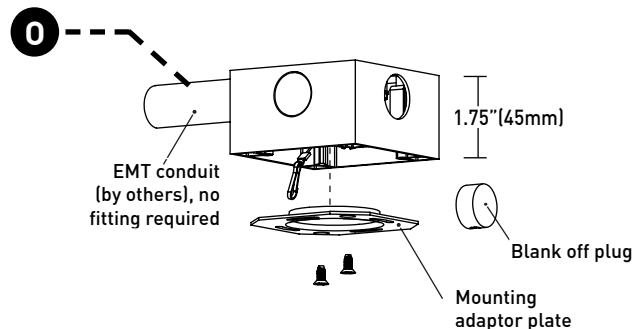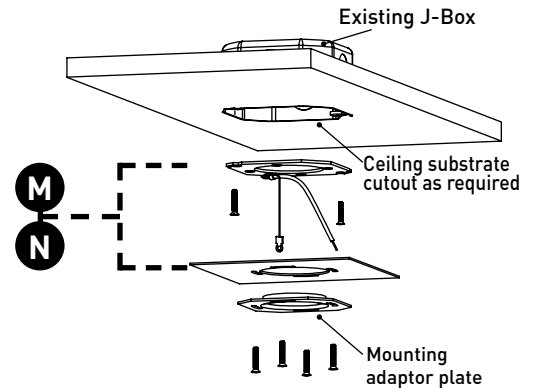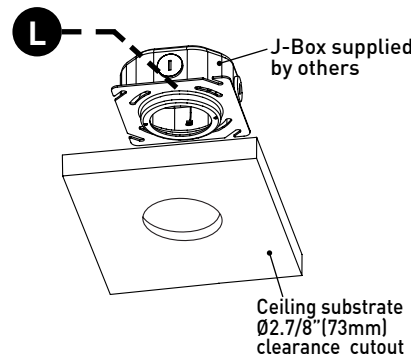

MOUNTING NOTES


- JBMP not recommended for use with pancake style j-box.

SQUILINDER FIXED SUSPENDED MOUNT

REMOTE POWER SUPPLY

- P** PS-RMT
Remote power supply provides additional driver options. Mounting device still required. Consult install guide for maximum allowable secondary run lengths between PS-RMT and fixture.

DIMENSIONS / DRAWINGS

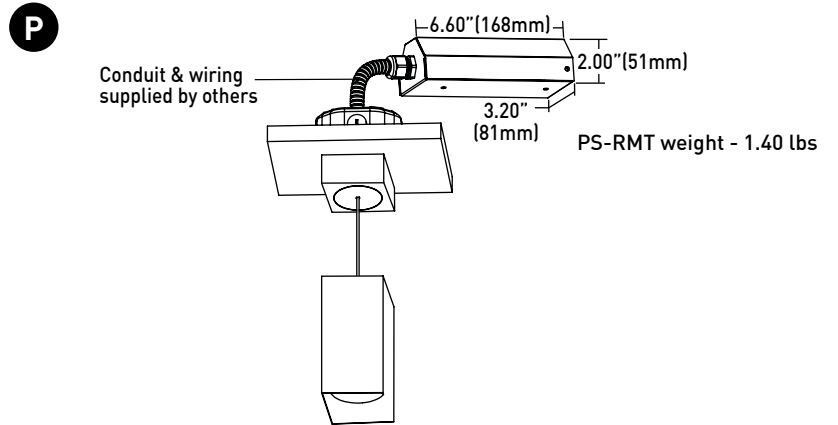

SQUILINDER FIXED SUSPENDED MOUNT

TECHNICAL

CONSTRUCTION

Squilinder: Machined aluminum body; painted finishes are granulated powder coat.

Dropkit Stem Assembly: Die-cast aluminum canopies and extruded aluminum stems; painted finishes are granulated powder coat.

CMJB: Die-cast aluminum body; painted finishes are granulated powder coat.

Remote Power Supply: 22 Gauge galvanized steel.

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2200K, 2700K, 3000K, 3500K and 4000K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3200K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

| Power Supply | CA2 | CE2 | TR2 | L23 | LH1 | LP1 | AN4 | LN2 | EA2 | LA2 | ED1 | LD1 |
|--------------|--------|--------|--------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| Minimum °C | -20 °C | -20 °C | -20 °C | 0 °C | 0 °C | 0 °C | -20 °C | -20 °C | -20 °C | -20 °C | -20 °C | -20 °C |
| Maximum °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C | 40 °C |
| Dimming % | 2.0% | 2.0% | 2.0% | 1.0% | 1.0% | 0.1% | 1.0% | 1.0% | 0.1% | 0.1% | 0.1% | 0.1% |

Note: For TR2, L23, LH1, LP1, AN4, LN2, EA2 and LA2 drivers consult chart on page 6 to confirm appropriate dimming curve for compatibility with selected control.

WALLWASH SPACING

Factory recommends 48" (1219mm) spacing on center with 36" (914mm) setback from wall plane.

MOUNTING

Pendant is supplied with a mounting adaptor plate, which integrates with specified mounting component. Dropkit Stem integrates directly with specified mounting component. JBMP provide a minimalist transition from standard 4/0 or 4" square junction boxes and accommodating ceiling thicknesses of 0.44" (12mm) to 0.75" (19mm). Ceiling-mount junction box available for 1/2" (13mm) and 3/4" (19mm) conduit and feature concealed internal clamps for clean fitting-free conduit exit and entry.

LISTING

cTUVus listed to UL1598 standard for Dry / Damp (IP14) locations. Title 24 JA8-2019 Listed.

WARRANTY

Manufacturer's 1-year warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service. 5-year warranty on LED and power supply to operate with 70% of the original flux and remain within a range of 3 duv. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller and conditional upon the use of manufacturer-supplied power supply. Consult [website](#) for full warranty terms and conditions.

CHANGE LOG

- 04/29/2021: ADDED WALLWASH UNIBODY AND LP1 DRIVER OFFERINGS.
- 03/17/2021: ADDED SMK MOUNTING OPTION FOR PENDANT.
- 03/17/2021: ADDED CMJB MOUNTING OPTION FOR DROPKIT.
- 01/12/2021: ADDED 2200K, 2700K-1800K WARM DIM AND 10 DEGREE OPTIC OFFERINGS.
- 09/21/2020: ADDED CMJB MOUNTING OPTION.
- 03/02/2020: UPDATED REPLACEMENT BAFFLE PART NUMBERS.
- 10/21/2019: ADDED QUICK SHIP.
- 9/12/2019: NEW CONSOLIDATED SPEC SHEET WITH SINGLE NOMENCLATURE FOR SPECIFICATION.
- 9/12/2019: FIXED BODY AND ADJUSTABLE FIXTURES NOW OFFERED WITH Dropkit.

SQUILINDER FIXED SUSPENDED MOUNT

DIMMING COMPATIBILITY

PHILIPS DRIVER COMPATIBILITY

| Power supply TR2 Manufacturer | Family/Model # |
|---|-----------------------|
| Lutron Electronics | DV-600P |
| Lutron Electronics | DVELV-303P |
| Lutron Electronics | NTELV-600 |
| Lutron Electronics | MAELV-600 |
| Lutron Electronics | SELV-300P |
| Lutron Electronics | DVLV-600P |
| Lutron Electronics | NFTU-5A |
| Lutron Electronics | CTCL-153P |
| Lutron Electronics | GL-600H |
| Lutron Electronics | S-600P |
| Lutron Electronics | PHPM |
| Power supply AN4 / LN2 Manufacturer | Family/Model # |
| Lutron Electronics | DVTV plus PP-DV |
| Lutron Electronics | DVSCTV plus PP-DV |
| Lutron Electronics | DVSTV |
| Lutron Electronics | DVSCSTV |
| Lutron Electronics | QSGRJ-XP plus GRX-TVI |
| Lutron Electronics | QSGRJ-XE plus GRX-TVI |
| Lutron Electronics | QSGR-XE plus GRX-TVI |
| Lutron Electronics | NFTV plus PP-DV |
| Lutron Electronics | NTSTV |
| Lutron Electronics | RMJ-5T |
| Lutron Electronics | RMJS-8T |
| Lutron Electronics | FCJS-010 |
| Leviton | IlumaTch IP7 series |
| Philips | Sunrise - SR1200ZTUNV |

LUTRON DRIVER COMPATIBILITY

| Power supply L23 Lutron Product Family | Part No. |
|---|------------------------------|
| Maestro WirelessR 600 W dimmer | MRF2-6ND-120- |
| Maestro WirelessR 1000 W dimmer | MRF2-10ND-120- |
| Caséta® Wireless Pro 1000 W dimmer | PD-10NXD- |
| GRAFIK T™ CL® dimmer | GT-250M-GTJ-250M- |
| HomeWorks® QS adaptive dimmer | HQRD-6NA- |
| HomeWorks® QS 600 W dimmer | HQRD-6ND- |
| HomeWorks® QS 1000 W dimmer | HQRD-10ND- |
| RadioRA® 2 adaptive dimmer | RRD-6NA- |
| RadioRA® 2 1000 W dimmer | RRD-10ND |
| myRoom™ DIN power module | MQSE-4A1-D |
| HomeWorks® QS DIN power module | LQSE-4A1-D |
| HomeWorks® QS wallbox power module | HQRJ-WPM-6D-120 |
| HomeWorks® wallbox power module | HWI-WPM-6D-120 |
| GRAFIK Eye® QS control unit | QSGR-, QSGRJ- |
| GRAFIK Eye® 3000 control unit | GRX-3100-GRX-3500- |
| RPM-4U module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®) | HW-RPM-4U-120 LP-RPM-4U-120 |
| RPM-4A module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®) | HW-RPM-4A-120, LP-RPM-4A-120 |
| GP dimming panels | Various |
| Ariadni CL 250W dimmer | AYCL-253P- |
| Diva CL 250W dimmer | DVCL-253P-DCSCCL-253P- |
| Nova T CL 250W dimmer | NTCL-250- |
| Power supply LH1 / LP1 Lutron Product Family | Part No. |
| PowPak Dimming Modules | RMJ-ECO32-DV-B |
| PowPak Dimming Modules | FCJ/FCJS-ECO |
| Energi Savr Nodes | QSN-1ECO-S |
| GRAFIK Eye QS control unit | QSN-2ECO-S |
| Homeworks QS control unit | QSGRJ- E (wireless) QSGR- E |
| Quantum Hub | QP2-__ 2C |
| Quantum Hub | QP2-__ 4C |
| Quantum Hub | QP2-__ 6C |
| Quantum Hub | QP2-__ 8C |
| Homeworks QS power module | LQSE-2ECO-D |
| myRoom Plus power module | |

eldoLED DRIVER COMPATIBILITY

| Power supply EA2 / LA2 Dimmer / Switch Control Manufacturer | Family/Model # |
|--|---|
| Busch-Jaeger | 2112U-101 |
| Jung | 240-10 |
| Leviton Lighting Controls | IP710-DLX |
| Lightolier Controls | ZP600FAM120 |
| Lutron Electronics | Nova T® - NTFTV |
| Lutron Electronics | Div@ - DVTV |
| Lutron Electronics | Nova@ - NFTV |
| Merten | 5729 |
| Pass & Seymour | CD4FB-W |
| The Watt Stopper | DCLV1 |
| Sensor Switch | nI0 EZ |
| Synergy | ISD BC |
| Power supply EA2 / LA2 Dimmer / Switch Control Manufacturer | Family/Model # |
| Dimmer / Switch Control Manufacturer | GrafixEye® GRX-TVI w GRX3503 Energy Savr Node™ - QSN-4T16-S |
| Lutron Electronics | TVM2 Module |
| Crestron® | GLX-DIMFLV8 |
| Crestron® | GLXP-DIMFLV8 |
| Crestron® | GLPAC-DIMFLV4-* |
| Crestron® | GLPAC-DIMFLV8-* |
| Crestron® | GLPP-DIMFLVEX-PM |
| Crestron® | GLPP-1DIMFLV2EX-PM |
| Crestron® | GLPP-1DIMFLV3EX-PM |
| Crestron® | DIN-A08 |
| Crestron® | DIN-4DIMFLV4 |
| Crestron® | CLS-EXP-DIMFLV |
| Crestron® | CLCI-1DIMFLV2EX |
| ABB | SD/S 2.16.1 |

