


FRAXION[®] 4 REMODEL SHALLOW REGRESS

- Max output of 3059lm at 80+ CRI
- Baffle options in round and square featuring UGR as low as 11
- Remodel drivers for tunable white with our 2 ranges, 1800K to 4000K and 2700K to 5000K
- Concrete Pour applications now available

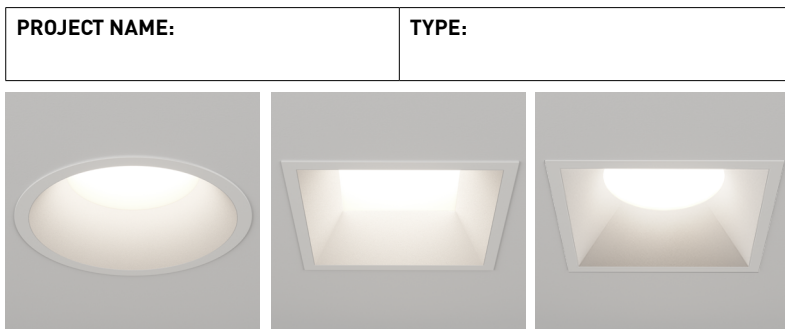

ORDERING INFORMATION - FIXTURE

SHAPE	RATING	TYPE	FINISH	BAFFLE FINISH	CRI	WATTAGE	CCT	OPTIC (UGR)	MEDIA	INSTALL TYPE	CEILING THICKNESS	DRIVER
F4RS Round Shallow Regress F4SS Square Shallow Regress F4TS Square Transitional Shallow Regress*	1 IP20 Dry/Damp 2 IP64 Wet* <small>* (Suction cup provided for aim and focus)</small>	A Adjustable F Fixed W Wall-wash	POWDERCOAT MICROFLANGE WH White AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze BK Black PR Primer CF Custom Finish* <small>(Consult Factory)</small> TRIMLESS TG Trimless Gypsum 1/16"* <small>(Not available for concrete pour installations)</small> TM Trimless Millwork* <small>(Not available for concrete pour installations)</small>	POWDERCOAT WH White AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze BK Black PR Primer CF Custom Finish* <small>(Consult Factory)</small>	STATIC WHITE 80S 80+ 90S 90+ 97S 97+	STATIC WHITE 11A 11W - 1351 Lm 15A 15W - 1681 Lm 15C 15W - 638 Lm* <small>(For use with 10° optic only)</small> 21A 21W - 2271 Lm 30B 30W - 3059 Lm	24 2400K* <small>(90+ CRI 11A, 15A, and 15C only)</small> 27 2700K 30 3000K 35 3500K 40 4000K	10 10°* (<10) <small>(15C packages only)</small> 15 15° (<16) 20 20° (<13) 25 25° (<13) 40 40° (<13) 60 60° (<13) 85 85°* >19) <small>(Requires -07 WDL effects device)</small> WW Wallwash* <small>(Required for wallwash)</small>	STANDARD MEDIA 04 Soft Focus Lens* <small>(Required for 10° Optic)</small> WW Wallwash Lens* <small>(Required for Wallwash)</small> ALTERNATE MEDIA 01 Honeycomb Louver* <small>(Not available for IP64 Wet Location, Adjustable Fixtures, or Warm Dim)</small> 02 Clear Glass Lens* <small>(Not available for Warm Dim)</small> 03 Frosted Glass Lens 05 Frosted Soft Focus Lens 06 Frosted Linear Spread Lens 07 Wide Distribution Lens* <small>(Required and only available for 85° optic)</small> HS Adjustable Honeycomb Louver and Soft Focus Lens* <small>(Not available for IP64 Wet Location, 21W or 22W, Fixed Fixtures, or Warm Dim)</small> NL No Lens* <small>(Not available for IP64 Wet Location or Warm Dim)</small>	REMODEL RM Remodel RR Remote Driver Remodel CONCRETE POUR KC Integral Driver* <small>(Not available for Athena and Casambi wireless controls)</small> KR Remote Driver	1 0.25" - 1.50"	REMODEL PH1 Forward / Reverse Phase, 2%, 120V SG3 eldoLED, ECOdrive 1% 0-10V, LOG, 120V-277V SN3 eldoLED, ECOdrive 1%, 0-10V, LIN, 120V-277V EG1 eldoLED, SOLOdrive 0.1% 0-10V, LOG, 120V-277V EN1 eldoLED, SOLOdrive 0.1% 0-10V, LIN, 120V-277V ED1 eldoLED, SOLOdrive 0.1% DALI-2, LOG, 120V-277V LP1 Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black, 120V or 277V REMOTE (120-277V) AS1 / ASR Athena Control eldoLED, SOLOdrive 0.1%, 120V-277V* <small>(Includes Athena Node. Extended lead time, consult factory. ASR includes EM Shunt)</small> CS1 / CSR Casambi Control eldoLED, SOLOdrive 0.1%, 120V-277V* <small>(Includes Casambi Node. Extended lead time, consult factory. CSR includes EM Shunt)</small> TUNABLE WHITE REMOTE (120-277V) DG1 eldoLED, DUALdrive 0.1% 0-10V, LOG DN1 eldoLED, DUALdrive 0.1% 0-10V, LIN DD2 eldoLED, DUALdrive 0.1% DALI-2 DT8, LOG AD1 / ADR Athena Control eldoLED, DUALdrive 0.1%* <small>(Includes Athena Node. Extended lead time, consult factory. ADR includes EM Shunt)</small> CD1 / Casambi Control eldoLED, DUALdrive 0.1%* <small>(Includes Casambi Node. Extended lead time, consult factory. CD1 includes EM Shunt)</small>
						LUMEN DELIVERED OUTPUTS REFLECT 80+ CRI / 3000K PAIRED WITH 25° OPTIC AND SOFT FOCUS LENS						



Declare.

FRAXION4 REMODEL SHALLOW REGRESS

ACCESSORIES

ROUND / SQUARE TRANSITIONAL ALTERNATE MEDIA

Dry/Damp location only.
Wet location requires alternate baffle.

- ☐ **CGL-F4RS** Clear Glass Lens*
* (Not available for Warm Dim)
- ☐ **FGL-F4RS** Frosted Glass Lens
- ☐ **SFL-F4RS** Soft Focus Lens
- ☐ **FSFL-F4RS** Frosted Soft Focus Lens
- ☐ **WDL-F4RS** Wide Distribution Lens*
* (Required and only available for 85° beam spread)
- ☐ **FLSL-F4R** Frosted Linear Spread Lens

SQUARE ALTERNATE MEDIA

Dry/Damp location only.
Wet location requires alternate baffle.

- ☐ **CGL-F4SS** Clear Glass Lens*
* (Not available for Warm Dim)
- ☐ **FGL-F4SS** Frosted Glass Lens
- ☐ **SFL-F4SS** Soft Focus Lens
- ☐ **FSFL-F4SS** Frosted Soft Focus Lens
- ☐ **WDL-F4SS** Wide Distribution Lens*
* (Required and only available for 85° beam spread)
- ☐ **FLSL-F4SS** Frosted Linear Spread Lens

ADJUSTABLE HCL ASSEMBLY

Dry / Damp location only.

- ☐ **OLR-F4RS1-SFL-HCL** Adjustable Honeycomb Louver and Soft Focus Lens*
* (Not available for IP64 Wet Location, 21W or 22W, Fixed Fixtures, or Warm Dim)

REPLACEMENT BAFFLE ASSEMBLY (INCLUDES MEDIA)

ASSEMBLY	SHAPE	TYPE	RATING	FINISH	MEDIA
RBA					
REPLACEMENT BAFFLE ASSEMBLY	F4RS Round Shallow Regress F4SS Square Shallow Regress F4TS Square Transitional Shallow Regress* * (Not available for Wallwash)	AF Adjustable / Fixed WW Wallwash	1 IP20 Dry/Damp 2 IP64 Wet* * (Requires provided suction cup to service or aim & focus)	WH White AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze BK Black PR Primer CF Custom Finish* * (Consult Factory)	04 Soft Focus Lens* * (Required for 10° optic) WW Wallwash Lens* * (Required for wallwash) 01 Honeycomb Louver* * (Not available for IP64 Wet Location, adjustable fixtures, or Warm Dim) 02 Clear Glass Lens* * (Not available for Warm Dim) 03 Frosted Glass Lens 05 Frosted Soft Focus Lens 06 Frosted Linear Spread Lens 07 Wide Distribution Lens* * (Required and only available for 85° optic) NL No Lens* * (Not available for IP64 Wet Location or Warm Dim)

REPLACEMENT OPTICS

Interchangeable optics accessible through fixture aperture.

STATIC WHITE

- ☐ **RO-70-15-S** 15° optic
- ☐ **RO-70-20-S** 20° optic
- ☐ **RO-70-25-S** 25° optic
- ☐ **RO-70-40-S** 40° optic
- ☐ **RO-70-60-S** 60° optic
- ☐ **RO-70-WW-S** Wallwash Optic

WARM DIM

- ☐ **RO-70-20-W** 20° optic
- ☐ **RO-70-25-W** 25° optic
- ☐ **RO-70-40-W** 40° optic
- ☐ **RO-70-60-W** 60° optic
- ☐ **RO-70-WW-W** Wallwash Optic

TUNABLE WHITE

- ☐ **RO-70-15-T** 15° optic
- ☐ **RO-70-20-T** 20° optic
- ☐ **RO-70-25-T** 25° optic
- ☐ **RO-70-40-T** 40° optic
- ☐ **RO-70-60-T** 60° optic
- ☐ **RO-70-WW-T** Wallwash optic

REPLACEMENT SUCTION TOOL

One included with every six fixtures designated Wet location.

- ☐ **F4-TOOL-SUCTION** Allows for removal of baffle with Wet location

EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- ☐ **EMB-S-25-120/277-LEDX** 25 watt max capacity, 120 or 277 VAC 60Hz, Non-Dimmable
- ☐ **EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable
- ☐ **EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable
- ☐ **EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz, 0-10V Dimmable

NOTE: SHUNT REQUIRED FOR USE WITH ATHENA AND CASAMBI CONTROLS, CONSULT FACTORY FOR DETAILS.

FRAXION4 REMODEL SHALLOW REGRESS

 PERFORMANCE - 3000K

PACKAGE	WATTS	10° OPTIC NO LENS		15° OPTIC SOFT FOCUS LENS		20° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS		85° OPTIC WIDE DISTRIBUTION		WW OPTIC	
		DLVD.	LPW	DLVD.	LPW	DLVD.	LPW	DLVD.	LPW	DLVD.	LPW	DLVD.	LPW	DLVD.	LPW	DLVD.	LPW
80S11A	11	-	-	1194	109	1255	114	1351	123	1246	113	1122	102	961	87	868	79
80S15A	15	638	42	1609	107	1689	113	1681	112	1612	107	1495	100	1296	86	1126	65
80S21A	21	-	-	2228	106	2264	108	2271	108	2179	104	2020	96	1762	84	1275	61
80S30B	30	-	-	2928	97	3104	103	3059	101	2917	97	2739	91	2419	80	2086	70
90S11A	11	-	-	1026	93	1078	98	1161	106	1070	97	964	88	826	75	746	68
90S15A	15	550	36	1382	92	1451	97	1444	96	1385	92	1284	86	1113	74	967	64
90S21A	21	-	-	1914	91	1945	93	1951	93	1872	89	1735	83	1514	72	1095	52
90S30B	30	-	-	2515	84	2667	89	2628	88	2506	84	2353	78	2078	69	1792	60
97S11A	11	-	-	901	82	946	86	1019	93	939	85	846	77	725	66	655	60
97S15A	15	475	31	1213	81	1274	85	1268	85	1216	81	1127	75	977	65	849	57
97S21A	21	-	-	1680	80	1708	81	1713	82	1644	78	1523	73	1329	63	961	46
97S30B	30	-	-	2208	74	2342	78	2307	77	2200	73	2066	69	1824	61	1573	52
90W15A (WL 27K-18K)	15	-	-	-	-	1055	70	1022	68	1001	67	949	63	851	57	771	51
90W15A (WD 30K-18K)	15	-	-	-	-	1056	70	1023	68	1007	67	957	64	858	57	794	53
90T15B (40K-18K)	15	-	-	1203	80	1267	84	1247	83	1191	79	1122	75	969	65	890	59
90T15B (50K-27K)	15	-	-	1192	79	1256	84	1236	82	1180	79	1112	74	960	64	882	59
90T22B (40K-18K)	22	-	-	1664	76	1752	80	1710	78	1651	75	1574	72	1351	61	1241	56
90T22B (50K-27K)	22	-	-	1649	75	1736	79	1695	77	1636	74	1560	71	1339	61	1230	59

MAX UNIFIED GLARE RATING

10° OPTIC NO LENS	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS	85° OPTIC WIDE DISTRIBUTION
<10	<16	<13	<13	<13	<13	>19


*UGR VALUES REFLECT WHITE BAFFLE AND 30 WATTS, LOWER UGR VALUES AVAILABLE WITH DIFFERENT FINISHES AND LOWER WATTAGES.

OUTPUT MULTIPLIER		TUNABLE WHITE MULTIPLIER			MEDIA LIGHT LOSS FACTOR	
CCT	CCT SCALE	CCT	5000K- 2700K	4000K- 1800K	MEDIA	LIGHT LOSS FACTOR
2400K	0.85	5000K	1.16	-	NO LENS	1.06
2700K	0.97	4000K	1.08	1.14	CGL	1.00
3000K	1.00	3500K	1.04	1.07	SFL	1.00
3500K	1.03	3000K	1.00	1.00	FGL	0.89
4000K	1.08	2700K	0.96	0.92	FSFL	0.81
		2400K	-	0.84	FLSL	0.82
		1800K	-	0.69	HCL	0.73


FRAXION4 REMODEL SHALLOW REGRESS

WARM DIM PERFORMANCE - 25° OPTIC - SOFT FOCUS LENS

INCANDESCENT DIMMING PROFILE							
WL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700	2650	2620	2520	2180	1950	1800
Light Output (Lm)	1022	817	715	511	204	102	20
Power (W)	15	12	10.5	7.5	3	1.5	.3
Efficacy (LPW)	68	68	68	68	68	68	68

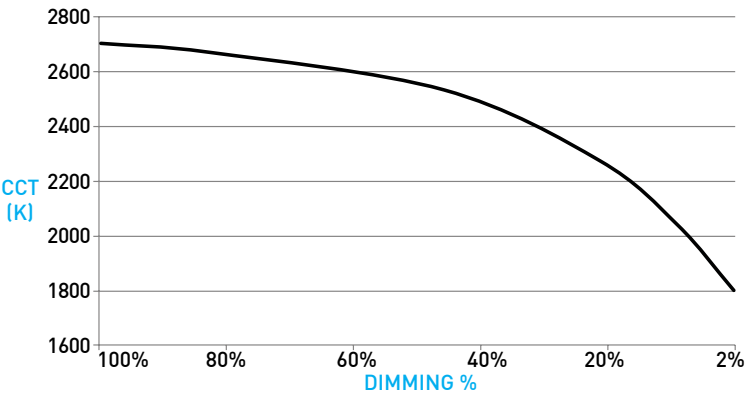

HALOGEN DIMMING PROFILE							
WD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (Lm)	1023	818	716	511	204	102	20
Power (W)	15	12	10.5	7.5	3	1.5	.3
Efficacy (LPW)	68	68	68	68	68	68	68

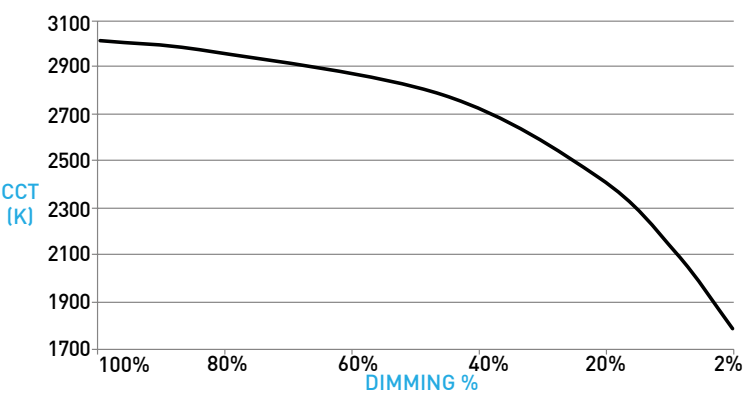

NOTE: LIN-TO-LIN 0-10V PAIRING NOT COMPATIBLE WITH WARM DIM.

FRAXION4 REMODEL SHALLOW REGRESS

DOWNLIGHT

A ADJUSTABILITY

Hot-aim tilt up to 40° and 361° rotation with Philips screwdriver, features 5° tilt increment indicators. Sliding pivot point optimizes center beam, ensuring unclipped beam of 15° at 40° tilt and 25° at 30° tilt.

B RETENTION

Integrated metal arm clamps located within fixture body allow discreet flange design, while accommodating varying ceiling thicknesses from 0.25" to 1.50". Snap-on spacer clips (3X) supplied for ceiling thickness below 0.50" only.

C OPTIC

Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering wallwash, 10°, 15°, 20°, 25°, 40° & 60° beams.

D 10° FIELD REDUCER

Provided with 10° optic. Pairs Soft Focus Lens, Field Reducer, and Honeycomb Louver to deliver tight 10° beam while reducing field angle by 30%.

E ADJUSTABLE HCL ASSEMBLY

Honeycomb Louver and Soft Focus Lens attach directly to optic with clip-on lens retainer and adjusts with fixture. Only compatible with no lens baffle. Dry/Damp locations only. Specified as "HS" Effects Device

F MICROFLANGE PROFILE

Provides industry standard 0.43" total contractor (goof) allowance with 0.27" flange. Thickness measures 1/16". IP64 Wet location features integral silicone gasket.

G TRIMLESS GYPSUM PROFILE

Installs totally flush with the ceiling with no visible trim. Features integrated appliqué for plaster floating directly to the baffle. Not recommended for stucco applications.

H EFFECTS DEVICES / LENS RETAINER

Fixture is limited to 1 effects device installed on the baffle, see Section E for Adjustable HCL assembly. Wet location effects device is sealed in place on baffle, suction tool provided for removal of baffle. Lens retainer allows effects devices to be changed in Dry /Damp locations.

I ROUND / SQUARE BAFFLE

Die-cast removable baffle provides easy access to adjustment mechanisms for tilt and rotation. Features 71° glare cutoff, minimizing aperture glare and concealing view into housing. Includes gasket, mitigating light leak.


SQUARE TRANSITIONAL BAFFLE

Die-cast removable baffle provides easy access to tilting mechanism and features 71° glare cutoff. Transitions from square aperture at ceiling plane to round aperture at light source. Minimizes aperture glare and conceals view into housing; includes gasket.

J WALLWASH BAFFLE / MEDIA

Die-cast baffle minimizes aperture glare and conceals view into housing; includes gasket. Asymmetrical spread lens, included and sealed in place, combined with angled optic and wide aperture enhance uniformity. Suction tool provided for removal of baffle.

DIMENSIONS / DRAWINGS

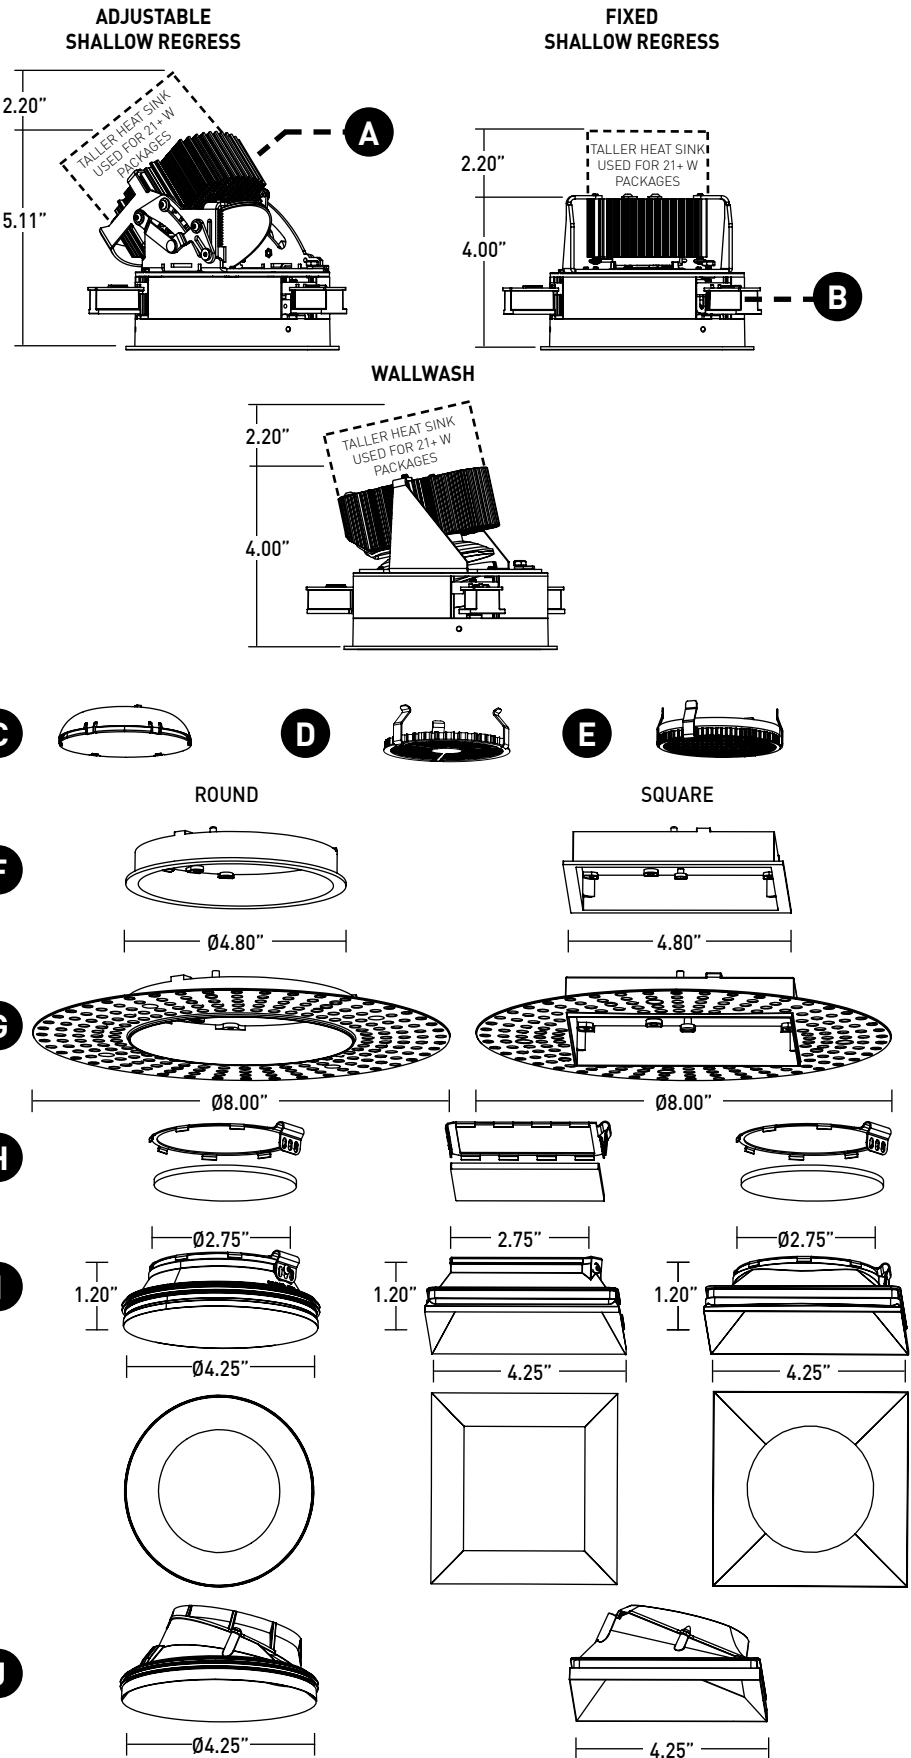

FRAXION4 REMODEL SHALLOW REGRESS

DOWNLIGHT

K

TRIMLESS MILLWORK PROFILE / SPACERS

No visible flange, installs totally flush with millwork. Requires rigid backing for installation. Includes (1) 1/16" spacer and (5) 1/8" spacers.


L

CONCRETE POUR HOUSING / PROFILE



- Provided with install types "KC and KR".
- Ships separate from downlight and power supply.
- Features 4 conduit entries compatible with 3/4" and 1" ENT.
- Includes tunnel to accommodate installation of power supply.
- Features broad mounting tolerance area for trim location.

DIMENSIONS / DRAWINGS

K

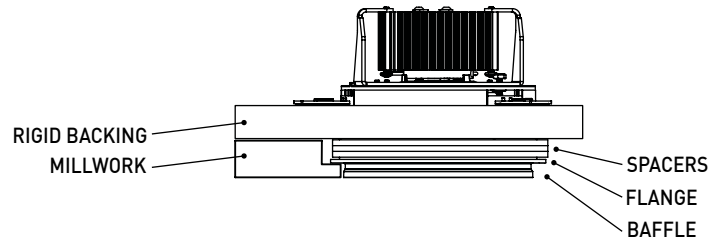

L

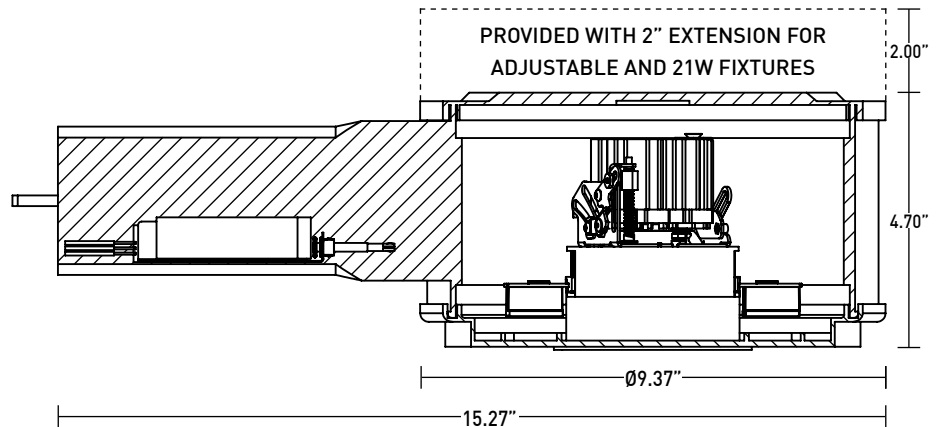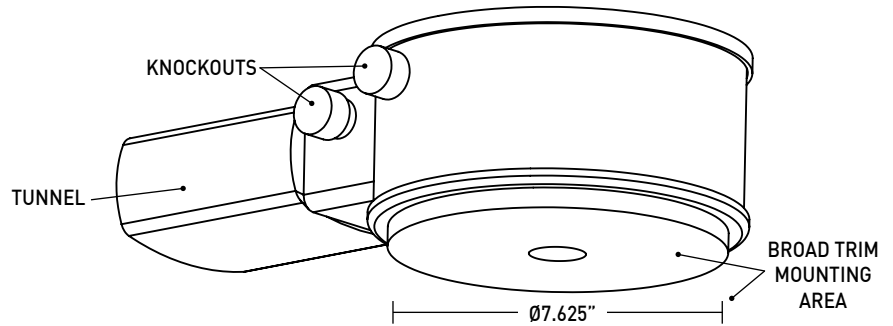


FRAXION4 REMODEL SHALLOW REGRESS

REMODEL POWER SUPPLY


M REMODEL WITH NON-IC TETHERED POWER SUPPLY

- Requires 4.42" cutout.
- Tethered power supply protected wiring and quick-connect plug between fixture and power supply.
- Minimum 0.75" clearance from top of fixture.
- Minimum setback from combustible and non-combustible materials of 6.61" radius from fixture centerline; minimum 3.00" from surfaces of power supply if not situated within above noted radius from fixture centerline.
- Minimum additional 3.00" setback from insulation material with max R-Value 30 from any surface of downlight fixture assembly.
- Minimum additional 6.00" setback from polycell spray foam insulation with max R-Value 60 from any surface of downlight fixture assembly.
- Consult factory for spacing requirements for any installations exceeding R-Value 60.
- Do not install in environments where ambient temperatures exceed 40°C (104°F).

M

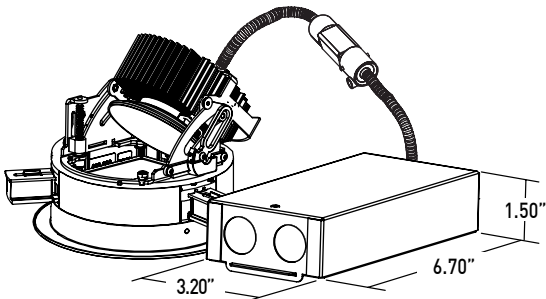

N

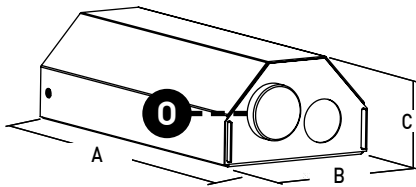

	A	B	C
STATIC WHITE / WARM DIM	6.94"	3.35"	2.00"
TUNABLE WHITE	8.10"	5.00"	2.00"
ATHENA / CASAMBI CONTROLLED	8.10"	5.00"	2.00"

REMOTE POWER SUPPLY

N REMOTE APPLICATIONS

- Provided with install type "KR" and "RR".
- Requires plenum rated Class 2 cable between fixture and remote driver. Cable supplied by others.
- See page 8 for maximum allowable wiring distance.
- Must be installed in an accessible location.
- Do not install in environments where ambient temperatures exceed 40°C (104°F).

O ATHENA / CASAMBI CONTROL


Controls integrated into remote driver assembly. All equipment is serviceable.

P ATHENA / CASAMBI EM SHUNT


Included with drivers specified as ASR, ATR, CSR, or CTR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.

Model Number: PS-RMT-SHUNT

P

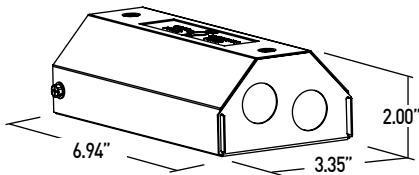

ATHENA / CASAMBI
EM SHUNT



FRAXION4 REMODEL SHALLOW REGRESS

TECHNICAL

CONSTRUCTION

Downlight: Painted finishes are granulated powder coat. Forged aluminum heat-sink.

Remote Power Supply: 22 Gauge galvanized steel.

Appliqué: Zinc alloy.

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K. 3-step MacAdam ellipse LED module available in 90+ CRI configuration in color temperature of 2400K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE	0-10V						ECO	DALI-2		ATHENA		CASAMBI	
Power Supply	PH1	SG3	SN3	EG1	EN1	DG1	DN1	LP1	ED1	DD1	AS1	AD1	CS1	CD1
Minimum °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	0 °C	-20 °C	-20 °C	0 °C	0 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For PH1, LP1, EG1 and EN1 drivers consult chart on page 9 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
PH1	285'	180'	113'	71'	45'
LP1	60'	40'	25'	15'	-
EG1, EN1, ED1, DG1, DN1, DD2, AS1, AD1, CS1, CD1	-	-	118'	72'	46'

WALLWASH SPACING

Recommended fixture spacing is 36" (914mm) on center with 36" (914mm) setback from wall plane.

LISTING

UL listed to UL1598 standard for Dry / Damp and Wet locations.

NEMA 410 Compliant.

U.S. Patent: 10,317,066

BUY AMERICAN ACT

All Fraxion4 Remodel configurations are Buy American Act compliant.

DECLARE

LBC Red List Approved.

WEIGHT

Fixture - 3 lbs max

Remote Driver - 1.4 lbs

LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. [Consult website for full warranty terms and conditions.](#)



FRAXION4 REMODEL SHALLOW REGRESS

DIMMING COMPATIBILITY

PHILIPS DRIVER COMPATIBILITY

Power supply PH1 Manufacturer	Family/Model #
Lutron Electronics	DV-600P
Lutron Electronics	DVELV-303P
Lutron Electronics	NTELV-600
Lutron Electronics	MAELV-600
Lutron Electronics	SELV-300P
Lutron Electronics	DVLV-600P
Lutron Electronics	NFTU-5A
Lutron Electronics	CTCL-153P
Lutron Electronics	GL-600H
Lutron Electronics	S-600P
Lutron Electronics	PHPM

LUTRON DRIVER COMPATIBILITY

Power supply LP1 Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- E (wireless) QSGR- _E
Quantum Hub	QP2- _ _ 2C
Quantum Hub	QP2- _ _ 4C
Quantum Hub	QP2- _ _ 6C
Quantum Hub	QP2- _ _ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	



eldoLED DRIVER COMPATIBILITY

Power supply EG1 / SG3 Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX

Power supply EN1 / SN3 Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DVTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nIO EZ
ABB	SD/S 2.16.1

ANALOG DRIVERS AND DIMMERS

