





0 S E R I E S + 1 S E R I E S

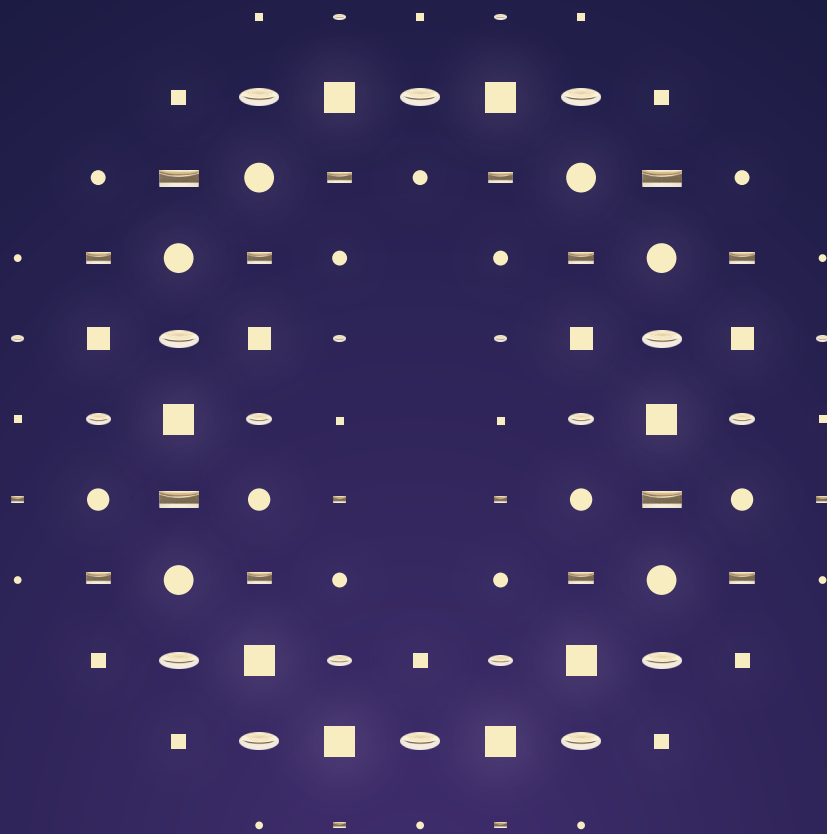

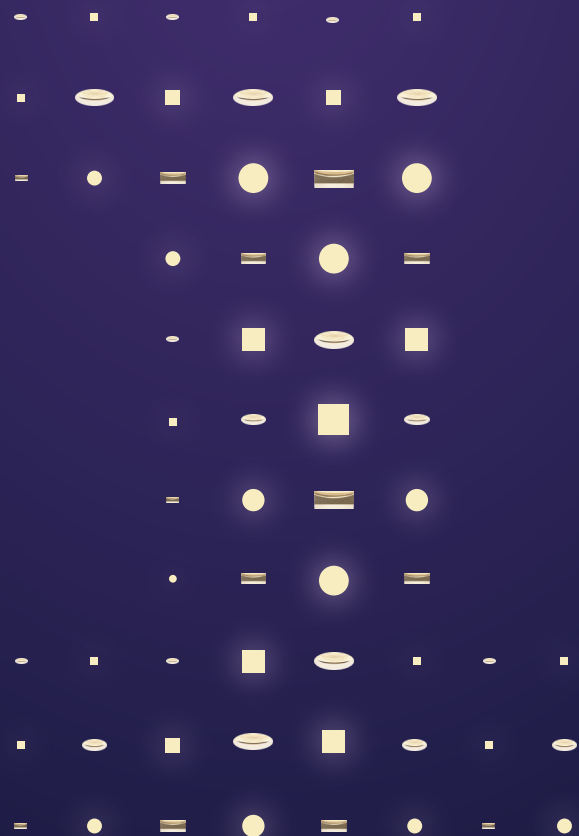

SUPPORT OR STAR — THE
0 AND 1 SERIES CAN DO IT ALL

0 Series Round Trimless
Conceptual Rendering

INSPIRED DESIGN FOR SEAMLESS INTEGRATION

A range of style options provide versatility in the most minimal forms.

0 SERIES


0.5" Aperture Micro Downlight



Trimless Round
0RM



Trimless Square
0SM

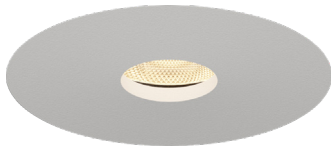

Flange Overlay Round
Drywall / Millwork
0RM




Flange Overlay Square
Drywall / Millwork
0SM

1 SERIES


1.0" Aperture Petit Downlight



Trimless Round
1RP



Trimless Square
1SP

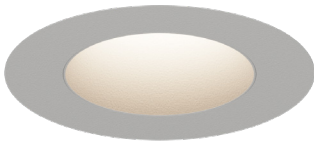

Flange Overlay Round
Drywall / Millwork
1RP



Flange Overlay Square
Drywall / Millwork
1SP

1 SERIES

1.6" Aperture Expanded Downlight



Trimless Drywall Round
Drywall / Millwork
1RE




Trimless Drywall Square
Drywall / Millwork
1SE



Flange Overlay Round
Drywall / Millwork
1RE



Flange Overlay Square
Drywall / Millwork
1SE

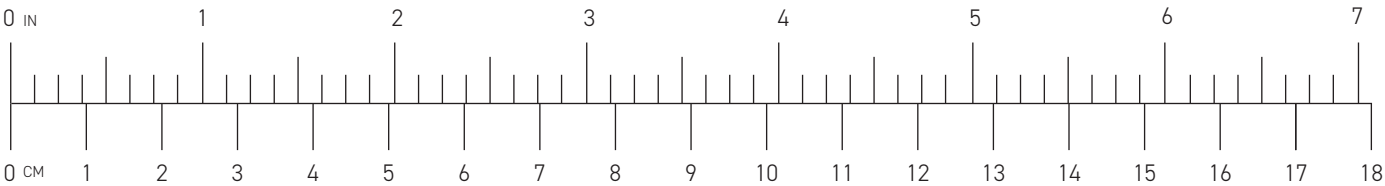

FIXTURES SHOWN AT ACTUAL SIZE

ELEGANT FINISHES FOR OPTIMAL CUSTOMIZATION

ALUMINA
BAFFLE + FLANGE




FIXTURE FINISHES

The full range of powdercoat options, as well as Alumina Finishes by Lucifer Lighting, allow for optimal customization while reducing baffle glare.

POWDERCOAT
BAFFLE + FLANGE



PLATED
FLANGE ONLY

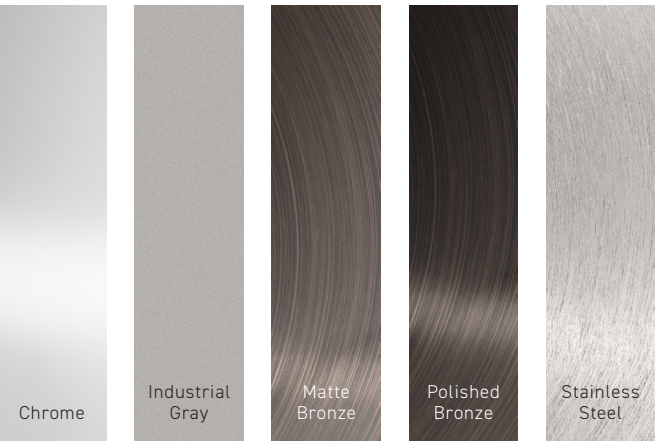

*0 SERIES BAFFLE IS ONLY AVAILABLE IN BLACK POWDERCOAT

PAIR THIS MICRODOWNLIGHT
WITH OUR OTHER LUMINAIRES
TO ELEVATE ANY SPACE

1 Series Round Trimless Conceptual
Rendering with STELLR Surface Mount



MINIMAL SCALE, MAXIMUM FLEXIBILITY

We engineer our housings to be as compact as possible, for maximum ceiling depth flexibility.

	0 Series (0.5")	1 Series (1.0")	1 Series (1.6")	1 Series (1.0") Adjustable	1 Series (1.6") Adjustable
Delivered Lumens	156 Lm - 1041 Lm	151 Lm - 1011 Lm	151 Lm - 1017 Lm	121 Lm - 889 Lm	123 Lm - 908 Lm
Beam Angles	20°, 30°, 40°	20°, 30°, 40°	20°, 30°, 40°	20°, 30°, 40°	20°, 30°, 40°
Glare Cut-Off Angle	32°	50°	53°	45°	45°
Remodel Heat Sink Depth	1.25" or 2"	1.25" or 2"	2"	3.9"	3.9"
Housing Depth	3.5"	3.5"	3.5"	4.63"	4.63"




DRIVER ACCESSIBILITY

All housings feature options for integral and remote drivers. For our smallest 0 Series trimless alternative, there is the choice to specify an integral driver with a clean "controlled break" for accessibility.

SMALL, BUT MIGHTY

With over 1,000 potential delivered lumens, these tiny downlights can illuminate a space without the need for additional fixtures.

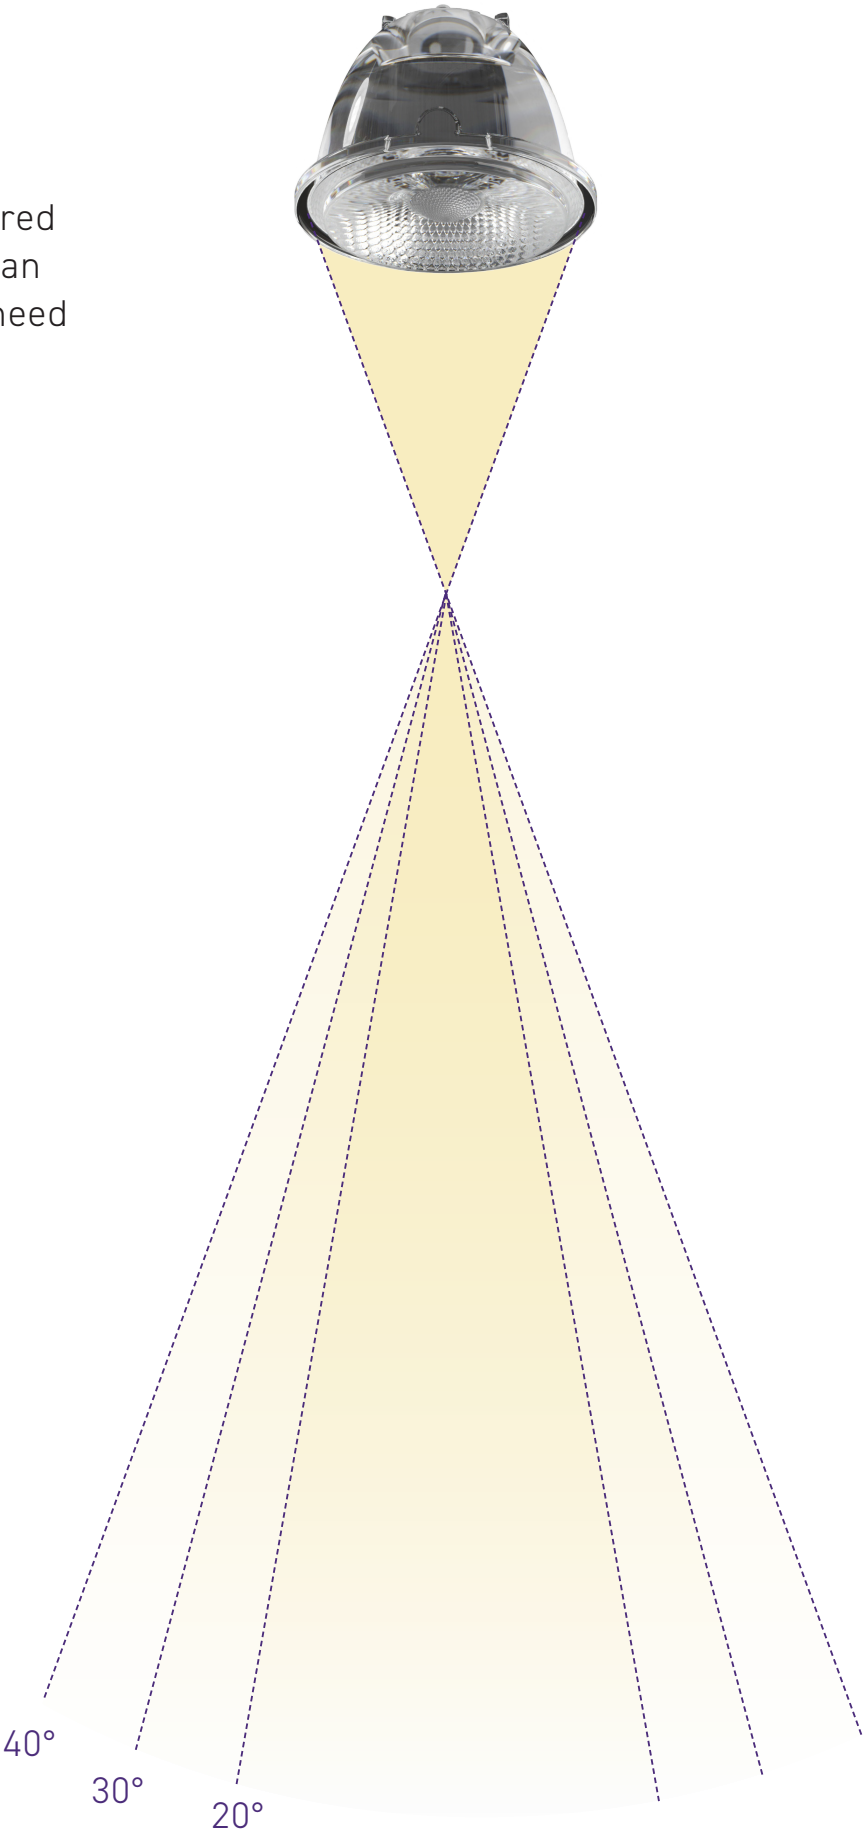

CROSSBEAM INNOVATION

All the 0 and 1 Series variations have beam angle options of 20°, 30°, and 40°.

For maximum visual comfort, the 1 Series features exceptionally low glare with UGR ratings between 2 and 10*.

*90+ CRI, 3,000K CCT WITH 40° OPTIC

1 Series Square Trimless
Conceptual Rendering



Actual Size



LUCIFER
LIGHTING COMPANY

luciferlighting.com

©2024 Lucifer Lighting Company. All rights reserved.