

STELLARIS™

SURFACE MOUNT

DESIGNER TEAR SHEET

Organic shape and minimalist form conceals the mechanics of this high-performance luminaire, offering both volumetric and directional lighting with multiple light sources and infinite control options for layered illumination.

ACCEPTING ORDERS JANUARY 2026

PROJECT NAME:	TYPE:
---------------	-------



FEATURES

- Choose your light sources between downlight and waveguide.
- Choose your controls grouping.
- Up to 8426 combined delivered lumens.
- For custom finish combinations, please contact: productsupport@luciferlighting.com


ILLUMINATION OPTIONS

Surface mount features downlight and waveguide; waveguide provides uplighting that is not independently controllable.

DOWNLIGHT



WAVEGUIDE

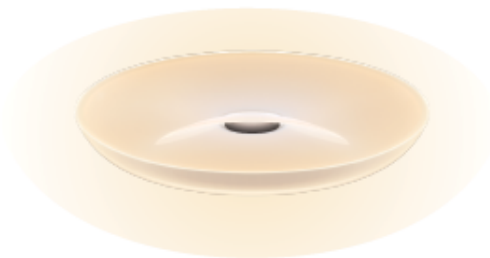

AVAILABLE FINISHES

					
[WH] White Powder Coat	[AG] Satin Silver Powder Coat	[AU] Cashmere Gold Powder Coat	[BB] Burnt Bronze Powder Coat	[BK] Black Powder Coat	[CF] Custom RAL Powder Coat

STELLARIS™

SURFACE MOUNT

DESIGNER TEAR SHEET

PROJECT NAME:	TYPE:
---------------	-------

ORDERING INFORMATION

SERIES	INTERIOR BODY FINISH	BAFFLE FINISH	EXTERIOR FINISH	DOWNLIGHT CRI / WATTAGE	DOWN- LIGHT CCT	OPTIC	MEDIA	WAVEGUIDE CRI / WATTAGE	WAVE- GUIDE CCT
S4S 30" Surface Mount Dry / Damp Rated	WH White	WH White	WH White	 STATIC WHITE 9L 90+ CRI, 38W, 3688 Lm 86 LPW 9M 90+ CRI, 50W, 4521 Lm 80 LPW	1 2700K 2 3000K	5 40° Beam	4 Soft Focus Lens	 STATIC WHITE 9M 90+ CRI, 50W, 3000 Lm 60 LPW 9H 90+ CRI, 75W, 4200 Lm 56 LPW	1 2700K 2 3000K
	AG Satin Silver	AG Satin Silver	AG Satin Silver						
	AU Cashmere Gold	AU Cashmere Gold	AU Cashmere Gold						
	BB Burnt Bronze	BB Burnt Bronze	BB Burnt Bronze						
	BK Black	BK Black	BK Black						
	CF Custom Finish*	CF Custom Finish*	CF Custom Finish*						
	*(Consult Factory)	*(Consult Factory)	*(Consult Factory)	NO DOWNLIGHT 00 No Downlight				0 No Downlight	

CONTROL ZONES	DRIVER TYPE	DRIVER (SELECT ONE)	MOUNTING
2 Zone A : Downlight Zone B : Waveguide Zone A and B controlled independently; can be wired to the same control zone as needed.	A Integral Driver	INTEGRAL 120V-277V SG3 1% 0-10V, LOG SN3 1% 0-10V, LIN EG1 eldoLED, SOLOdrive, 0.1% 0-10V, LOG EN1 eldoLED, SOLOdrive, 0.1% 0-10V, LIN ED1 eldoLED, SOLOdrive, 0.1% DALI-2 DT6, LOG	J Standard, J-Box Surface Mounting Plate

STATIC WHITE OUTPUT MULTIPLIER


CCT	CCT SCALE
2700K	0.96
3000K	1.00

STELLARIS SURFACE MOUNT DESIGNER TEAR SHEET

SURFACE MOUNT

- A CEILING 'J' MOUNT**
Integral mounting adapter attaches to standard 4/0 box. Features easy twist-on engagement to fixture and safety lanyard. No rough-in components required.
- B LUMINAIRE**
Body with integrated heat sink and LED assemblies. Power supplies may be integral or remote mount.
- C BACKCAP**
Conceals hidden twist-on mounting hardware and houses integral driver assemblies. Available in powdercoat finishes.
- D BODY**
Visible when off behind waveguide. Available in powdercoat finishes.
- E WAVEGUIDE**
Transmits light creating illumination effect. Ships with protective cover installed.
- F OPTIC**
Robust light engine with optimized optic pairing integrates Reflection, Refraction and TIR offering 40° beam.
- G MEDIA**
Limited to one effects device; Soft Focus Lens.
- H BAFFLE**
Machined removable baffle features 71.5° glare cutoff. Minimizes aperture glare and conceals view into fixture; includes silicone gasket. Accommodates one effects devices.

DIMENSIONS / DRAWINGS

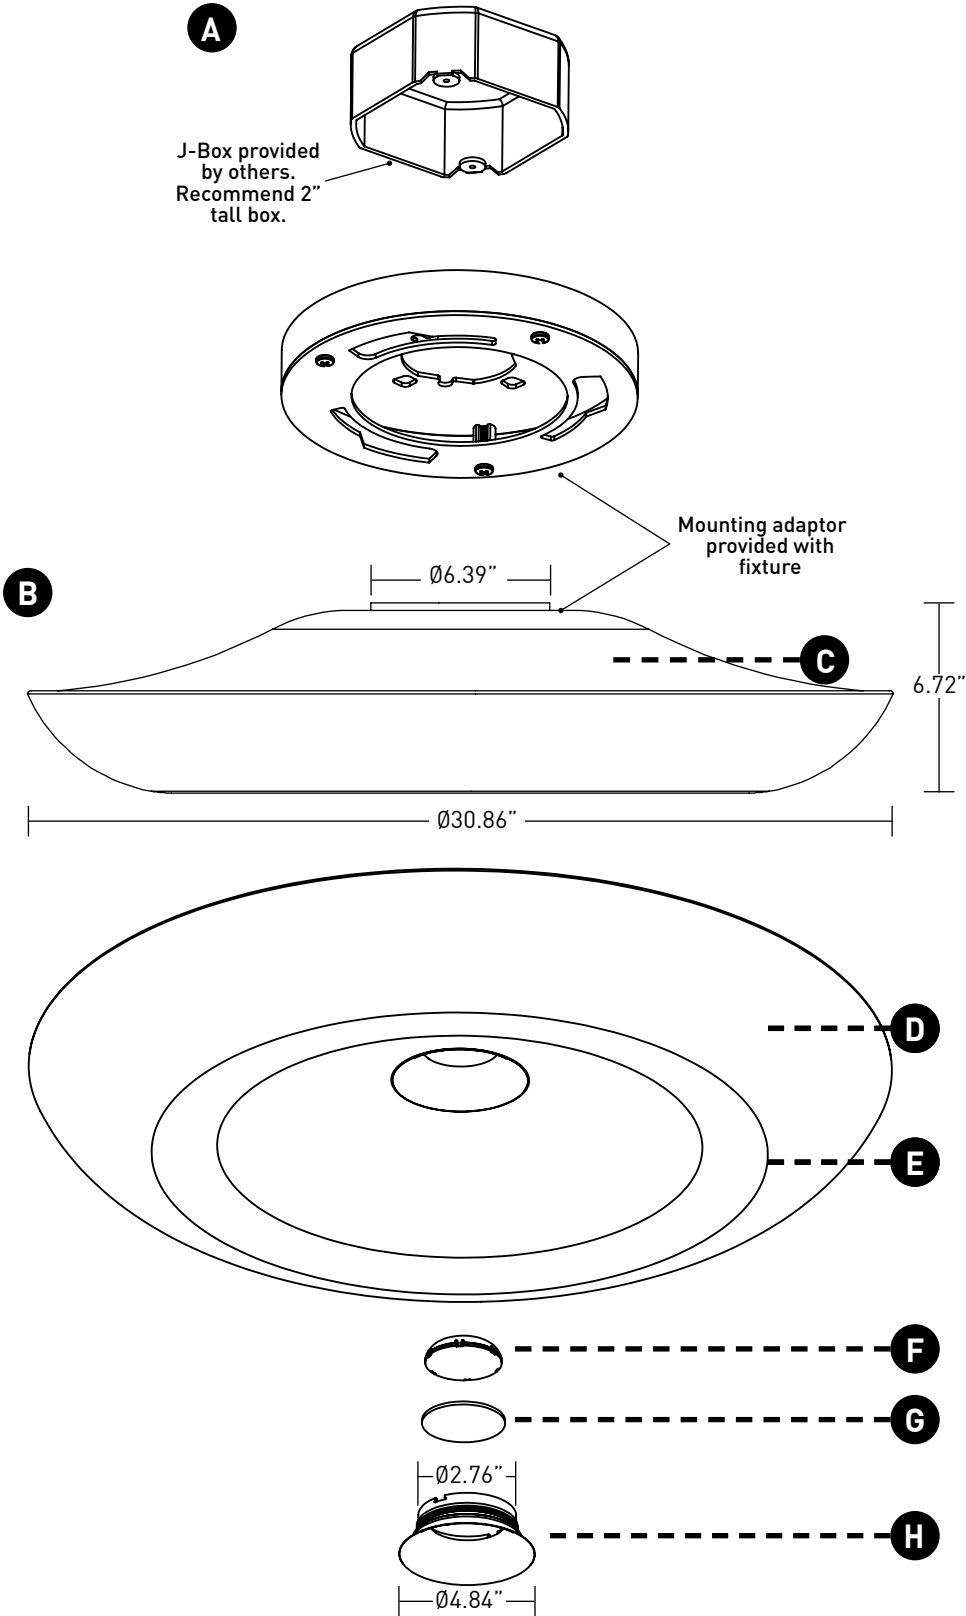

CLEANING INSTRUCTIONS

Factory recommends cleaning waveguide assembly with a microfiber cloth or similar non-abrasive cloth. In most cases a damp microfiber cloth will remove dust/debris or fingerprints. For stubborn stains, approved cleaning agents include soap and water.

STELLARIS SURFACE MOUNT DESIGNER TEAR SHEET

TECHNICAL

CONSTRUCTION

Fixture: Machined aluminum canopy and spun reflector; die-cast aluminum heat-sink; painted finishes are granulated powder coat.

STATIC WHITE LED



2-step MacAdam ellipse LED module available in 90+ CRI configurations in color temperatures of 2700K and 3000K. Average rated lamp life: 50,000 hours. LED and driver assemblies are field-replaceable.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	0-10V				DALI
Power Supply	SG3	SN3	EG1	EN1	ED1
Minimum °C	-10 °C	-10 °C	-20 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	1.0%	1.0%	0.1%	0.1%	0.1%

MOUNTING

Fixture is supplied with a mounting adapter, which integrates with standard 4/0 junction boxes.

LISTING

Pending UL listing to UL1598 standard for Dry / Damp locations. NEMA 410 Compliant.

LIMITED WARRANTY

Manufacturer's 1-year warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service. 5-year warranty on LED and power supply to operate with 70% of the original flux and remain within a range of 3 duv. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. Consult [website](#) for full warranty terms and conditions.