

MONOPOINT

CM2 WALL MOUNT

90DEG WET RATED

Elegant design mounts seamlessly and invisibly to the wall. An inventive elbow built into the fixture body that features a full 90 degree tilt.

⚡ JBMP AVAILABLE FOR 5 DAY QUICK SHIP. SEE BELOW AND PAGE 2 FOR DETAILS.

PROJECT NAME:

TYPE:



ORDERING INFORMATION - MONOPOINT



JBMP eligible for Quick Ship.
Note ⚡ following SKUs below for eligibility.
All orders must have "QS" at end of part number.



JA8-2022 INDICATED BY SHADING

CYLINDER	LENGTH	FIXTURE	BODY FINISH	BAFFLE FINISH	STEM FINISH	CRI / WATTAGE PACKAGE	CCT	OPTIC (UGR)	DRIVER	MEDIA	MOUNTING
CM2	SL	F92									
CM2 3.25"	LENGTHS SL 1.4" Standard STEM IS NOT FIELD CUTTABLE	FIXED ANGLE WET (IP65) F92 Fixed 90° Tilt	POWDERCOAT WH White BK Black AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze CF Custom Finish* *(Consult Factory)	POWDERCOAT WH White BK Black AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze CF Custom Finish* *(Consult Factory)	POWDERCOAT WH White BK Black AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze CF Custom Finish* *(Consult Factory)	STATIC WHITE 80S11A 80+ CRI, 11 Watts Im Delivered - 1216 80S17A 80+ CRI, 17 Watts Im Delivered - 1843 90S11A 90+ CRI, 11 Watts Im Delivered - 1045 90S17A 90+ CRI, 17 Watts Im Delivered - 1583 97S11A 97+ CRI, 11 Watts Im Delivered - 918 97S17A 97+ CRI, 17 Watts Im Delivered - 1390	24 2400K* *(90+ CRI only) 27 2700K 30 3000K 35 3500K 40 4000K	10 10°* (>19) *(17W package only) 15 15° (<13) 20 20° (<10) 25 25° (<10) 40 40° (<10) 60 60° (<16)	INTEGRAL CA3 0-10V, LIN 120V-277V CE3 Forward / Reverse Phase, 120V REMOTE (120V) RE3 Forward / Reverse Phase, 120V* *(Not available for 28W) REMOTE (120V-277V) LH1 Lutron, Hi-Lume Ecosystem 1% Fade to Black, Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black LP1 Lutron, Hi-Lume Ecosystem 0.1% Fade to Black EG1 eldoLED, SOLOdrive 0-10V, 0.1%, LOG ED1 eldoLED, SOLOdrive DALI-2, 0.1%, LOG LX1 eldoLED, SOLOdrive DMX, 0.1%, LOG AS1 Athena Control eldoLED, DUALdrive 0.1%* *(Includes Athena Node. Increased lead time) HUB Separate Remote Power Supply and Distribution Hub, Powers up to 6 Fixtures* *(Requires further specification on page 2) BUD Combined Remote Power Distribution, Powers up to 6 Fixtures* *(Requires further specification on page 2) TUNABLE WHITE POWER SUPPLIES (120-277V) DD2 eldoLED, DUALdrive DALI-2 D18, 0.1% LOG DG1 eldoLED, DUALdrive 0-10V, 0.1%, LOG MX2 DMX, 0.1%, LOG AD1 Athena Control eldoLED, DUALdrive 0.1%* *(Includes Athena Node. Increased lead time) LOW VOLTAGE SYSTEM LVS Low Voltage System* *(See page 9 for specification information)	STANDARD MEDIA 4 Soft Focus Lens* *(Required for 10" optic) ALTERNATE MEDIA 3 Clear Glass Lens 5 Frosted Glass Lens 6 Frosted Soft Focus Lens 7 Frosted Linear Spread Lens S Soft Focus Lens w/ Honeycomb Louver F Frosted Glass Lens w/ Honeycomb Louver	ROUGH-IN J JBMP Ⓞ 4" Sq. or 4/0 Junction Box Mounting Plate. Features 2.6" diameter canopy.* *(Mounting plate must be installed on junction box prior to substrate installation) FINISH OUT R Remodel 4.5" diameter Flange Overlay Canopy.* *(Mounts to existing 4/0 junction box)
			ALUMINA INTERIOR APPLICATIONS ONLY 01 Brushed Obsidian 02 Matte Obsidian 03 Brushed Dark Patinated Bronze 04 Matte Dark Patinated Bronze 05 Brushed Aged Aluminum 06 Matte Aged Aluminum 07 Brushed Cast Brass 08 Matte Cast Brass 09 Brushed Light Patinated Bronze 10 Matte Light Patinated Bronze ALUMINA NOT RECOMMENDED FOR EXTERIOR APPLICATIONS, FINISHES ARE NOT UV RATED	ALUMINA CONSULT FACTORY FOR ALUMINA FINISHES	ALUMINA CONSULT FACTORY FOR ALUMINA FINISHES	REMOTE STATIC WHITE 80S28B 80+ CRI, 28 Watts Im Delivered - 2756 90S28B 90+ CRI, 28 Watts Im Delivered - 2368 97S28B 97+ CRI, 28 Watts Im Delivered - 2079 WARM DIM 90L17A 90+ CRI, 17 Watts Incandescent Profile Im Delivered - 1244 Halogen Profile Im Delivered - 1309 SEE PAGE 3 FOR WARM DIM PROFILE COMPARISON. REMOTE TUNABLE WHITE 90T28B 90+ CRI, 28W Cool Profile: 5000K - 2700K Im Delivered - 1977 Warm Profile: 4000K - 1800K Im Delivered. - 1995	27 2700K 30 3000K 35 3500K* *(Not available for 97+ CRI) 40 4000K WL 2700K - 1800K WD 3000K - 1800K TH 5000K - 2700K TR 4000K - 1800K	15 15° (<13) 20 20° (<10) 25 25° (<10) 40 40° (<10) 60 60° (<16) 15 15° (<13) 20 20° (<10) 25 25° (<13) 40 40° (<13) 60 60° (<16)			
						ALL LM DELIVERED AND T24 COMPLIANCE REFLECT 3000K PAIRED WITH 20° OPTIC AND SOFT FOCUS LENS					

PART NUMBER NOTES

- CM2 ships as e.g., CM2SLF92WHBKWH90S11*3040CA*4
- Remote driver ships as e.g., PS-RMT-90S-28B-1RE*
- Mounting ships separate from fixture, part numbers listed on page 5.



LUCIFER
LIGHTING COMPANY

luciferlighting.com

©2026 Lucifer Lighting Company

As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.

[PH] +1-210-227-7329
[FAX] +1-210-227-4967

pg. 1

[DATE OF REV: 07162026]

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

QUICK SHIP PROGRAM ⚡

The Lucifer Lighting Quick Ship Program brings our most in-demand fixtures to your project faster. We've selected our most sought-after fixtures, finishes, and configurations and streamlined production guaranteed to ship in 5 business days. Consult [Quick Ship](#) brochure for complete terms and conditions.

- No minimum quantity, up to 100 units per PO.
- PO Must be recieved by 3PM CST, ships in 5 business days starting after the day of receipt.
- Only Quick Ship eligible JBMP and related monopooints may be on the same PO; one PO per project.
- Entire part number must include quick ship eligible items, add "QS" to end of model numbers.
- JBMP will be split out from Monopoint upon receipt of PO, Monopoint will ship on the same PO with standard lead times.

HUB AND BUD

CONFIGURATION - REQUIRED FOR 'HUB' AND 'BUD' DRIVER SPECIFICATION

ASSEMBLY	QTY	WATTAGE	REMOTE DRIVER
HUB Separate Remote Power Supply and Distribution Hub	2X 2 Fixtures	11W 11Watts	PH1 Forward /Reverse Phase, 2%, 120V SG5 eldoLED, ECOdrive 1%, 0-10V, LOG, 120V-277V EG1 eldoLED, SOLOdrive 0.1% 0-10V, LOG, 120V-277V ED1 eldoLED, SOLOdrive 0.1% DALI-2, LOG, 120V-277V AS1 Athena Control, eldoLED, SOLOdrive, 0.1%, 120V-277V* *(Includes Athena Node. Extended lead time, consult factory)
	3X 3 Fixtures	17W 17Watts	
	4X 4 Fixtures	28W 28Watts	
	5X 5 Fixtures		
BUD Combined Remote Power Distribution	6X 6 Fixtures		

COMPATIBILITY BY DRIVER TYPE AND QUANTITY



DRIVER	2 FIXTURES			3 FIXTURES			4 FIXTURES			5 FIXTURES			6 FIXTURES		
	11W	17W	28W	11W	17W	28W	11W	17W	28W	11W	17W	28W	11W	17W	28W
PH1	✓	✓	✓	✓	✓		✓			✓					
SG5	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓		
EG1/ED1	✓	✓	✓	✓	✓		✓	✓		✓			✓		
AS1	✓	✓	✓	✓	✓		✓	✓		✓			✓		

PART NUMBER NOTES

- HUB and BUD assemblies are ordered as separate line item from fixtures.

FINISHES

POWDERCOAT FINISHES

					
[WH] White	[BK] Black	[AB] Architectural Bronze	[AG] Satin Silver	[AU] Cashmere Gold	[BB] Burnt Bronze

ALUMINA FINISHES BY LUCIFER LIGHTING™

				
[01] Brushed Obsidian	[03] Brushed Dark Patinated Bronze	[05] Brushed Aged Aluminum	[07] Brushed Cast Brass	[09] Brushed Light Patinated Bronze
				
[02] Matte Obsidian	[04] Matte Dark Patinated Bronze	[06] Matte Aged Aluminum	[08] Matte Cast Brass	[10] Matte Light Patinated Bronze

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

ACCESSORIES

REPLACEMENT MEDIA

- ☐ **HCL-CT2** Honeycomb Louver
- ☐ **CGL-CT2** Clear Glass Lens
- ☐ **SFL-CT2** Soft Focus Lens
- ☐ **FGL-CT2** Frosted Glass Lens
- ☐ **FSFL-CT2** Frosted Soft Focus Lens
- ☐ **FLSL-CT2** Frosted Linear Spread Lens

REPLACEMENT OPTICS

Interchangeable optics accessible by removing baffle.

- | Static White | Warm Dim | Tunable White |
|--|--|--|
| ☐ RO-70-15-S 15° optic | ☐ RO-70-15-W 15° optic | ☐ RO-70-15-S 15° optic |
| ☐ RO-70-20-S 20° optic | ☐ RO-70-20-W 20° optic | ☐ RO-70-20-S 20° optic |
| ☐ RO-70-25-S 25° optic | ☐ RO-70-25-W 25° optic | ☐ RO-70-25-S 25° optic |
| ☐ RO-70-40-S 40° optic | ☐ RO-70-40-W 40° optic | ☐ RO-70-40-S 40° optic |
| ☐ RO-70-60-S 60° optic | ☐ RO-70-60-W 60° optic | ☐ RO-70-60-S 60° optic |

EMERGENCY LIGHTING - REMOTE MOUNT ONLY

- ☐ **EMB-S-25-120/277-LEDX** 25 watt max capacity, 120 or 277 VAC 60Hz
- ☐ **EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V dimmable
- ☐ **EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V dimmable
- ☐ **EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

NOTE: CONSULT FACTORY FOR USE WITH WIRELESS CONTROLS.

REPLACEMENT BAFFLE ASSEMBLY (INCLUDES MEDIA)

ASSEMBLY	SHAPE	RATING	FINISH	MEDIA
RBA	CM2			
REPLACEMENT BAFFLE ASSEMBLY	CM2 3.25"	2 IP65 Wet* *(Requires provided suction cup to service)	WH White BK Black AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze PR Primer CF Custom Finish * *(Consult Factory)	LEAVE BLANK FOR SOFT FOCUS LENS (SFL) HCL Honeycomb Louver* *(Not available for Wet Location) CGL Clear Glass Lens FGL Frosted Glass Lens FSFL Frosted Soft Focus Lens FLSL Frosted Linear Spread Lens NL No Lens * *(Not available for Wet Location)

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

PERFORMANCE - 3000K

LUMEN PACKAGE	WATTAGE	10° OPTIC FIELD REDUCER		15° OPTIC SOFT FOCUS LENS		20° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80S11A	11	613	55	1143	104	1216	111	1202	109	1124	102	949	86
80S17A	17	828	49	1750	103	1843	108	1823	107	1690	99	1440	85
80S28B	28	-	-	2571	92	2756	98	2694	96	2529	90	2072	74
90S11A	11	528	48	982	89	1045	95	1033	94	966	88	815	74
90S17A	17	714	42	1503	88	1583	91	1566	92	1452	85	1237	73
90S28B	28	-	-	2209	79	2368	85	2314	83	2193	78	1780	64
97S11A	11	456	41	862	78	918	83	907	82	848	77	716	65
97S17A	17	616	36	1320	78	1390	82	1375	81	1275	75	1086	64
97S28B	28	-	-	1939	69	2079	74	2032	73	1908	68	1563	56
90L17A (2700K-1800K)	17	-	-	1249	73	1244	73	1229	72	1177	69	1046	62
90L17A (3000K-1800K)	17	-	-	1314	77	1309	77	1293	76	1238	73	1100	65
90T28B (4000K-1800K)	28	-	-	1972	70	1995	71	1971	70	1837	66	1655	59
90T28B (5000K-2700K)	28	-	-	1954	70	1977	71	1953	70	1820	65	1640	59

TITLE 24 JA8-2022 INDICATED BY SHADING

UNIFIED GLARE RATING

10° OPTIC FIELD REDUCER	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS
>19	<13	<13	<13	<13	<16

MEDIA LIGHT LOSS MULTIPLIER

MEDIA	LIGHT LOSS FACTOR
No Lens	1.05
CGL	1.00
SFL	1.00
FGL	0.85
FSFL	0.82
FLSL	0.78
HCL	0.75
SFL W/ HCL	0.68
FGL W/ HCL	0.47

OUTPUT MULTIPLIER

CCT	CCT SCALE
2400K	0.85
2700K	0.97
3000K	1.000
3500K	1.03
4000K	1.08


TUNABLE WHITE MULTIPLIER

CCT	5000K-2700K	4000K-1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69

WARM DIM PERFORMANCE - SOFT FOCUS LENS - 20° OPTIC


INCANDESCENT PROFILE

90L17AWL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700	2700	2700	2700	2500	1950	1800
Light Output (Lm)	1244	995	871	622	249	124	25
Power (W)	17	8.8	7.7	5.5	2.2	1.1	0.2
Efficacy (LPW)	73	73	73	73	73	73	73

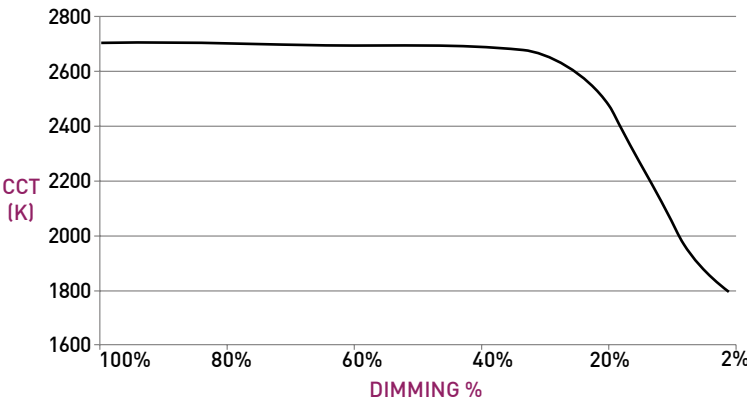

HALOGEN PROFILE

90L17AWD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	3000	3000	3000	3000	2150	1800
Light Output (Lm)	1309	1047	916	655	262	131	26
Power (W)	17	8.8	7.7	5.5	2.2	1.1	0.2
Efficacy (LPW)	77	77	77	77	77	77	77

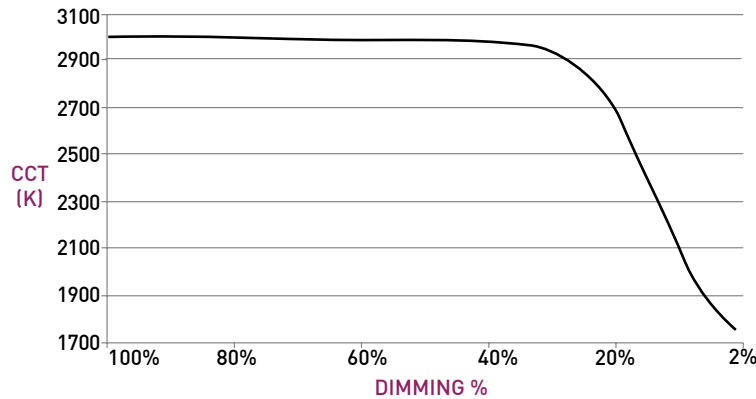


NOTE: LIN-TO-LIN 0-10V PAIRING NOT COMPATIBLE WITH WARM DIM.

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

MONOPOINT

- A STEM**
Standard length is 1.4". Stem is not field cuttable. Powdercoat finishes standard, consult factory for Alumina finishes.
- B BODY**
Available in powdercoat finishes and Alumina finishes (interior applications only). Power supply integrated into fixture body.
- C OPTICS**
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 10°, 15°, 20°, 25°, 40° & 60° beams.
- D 10° FIELD REDUCER**
Soft Focus Lens, Honeycomb Louver, and Field Reducer provided with 10° optic. Reduces field angle by 30%.
- E MEDIA**
Soft Focus Lens standard. Wet location media sealed in place.
- F BAFFLE**
Accepts 2 media devices. Baffle minimizes aperture glare and conceals view into fixture. Powdercoat finishes standard, consult factory for Alumina finishes.
- G CANOPY**
Features 0.3" deep canopy and mounting screws.
- H FIXED FIXTURE**
Available with pre-set tilt of 90° and can be aimed up to 45° off vertical. Wet rated, may be used in Dry / Damp locations.

DIMENSIONS / DRAWINGS

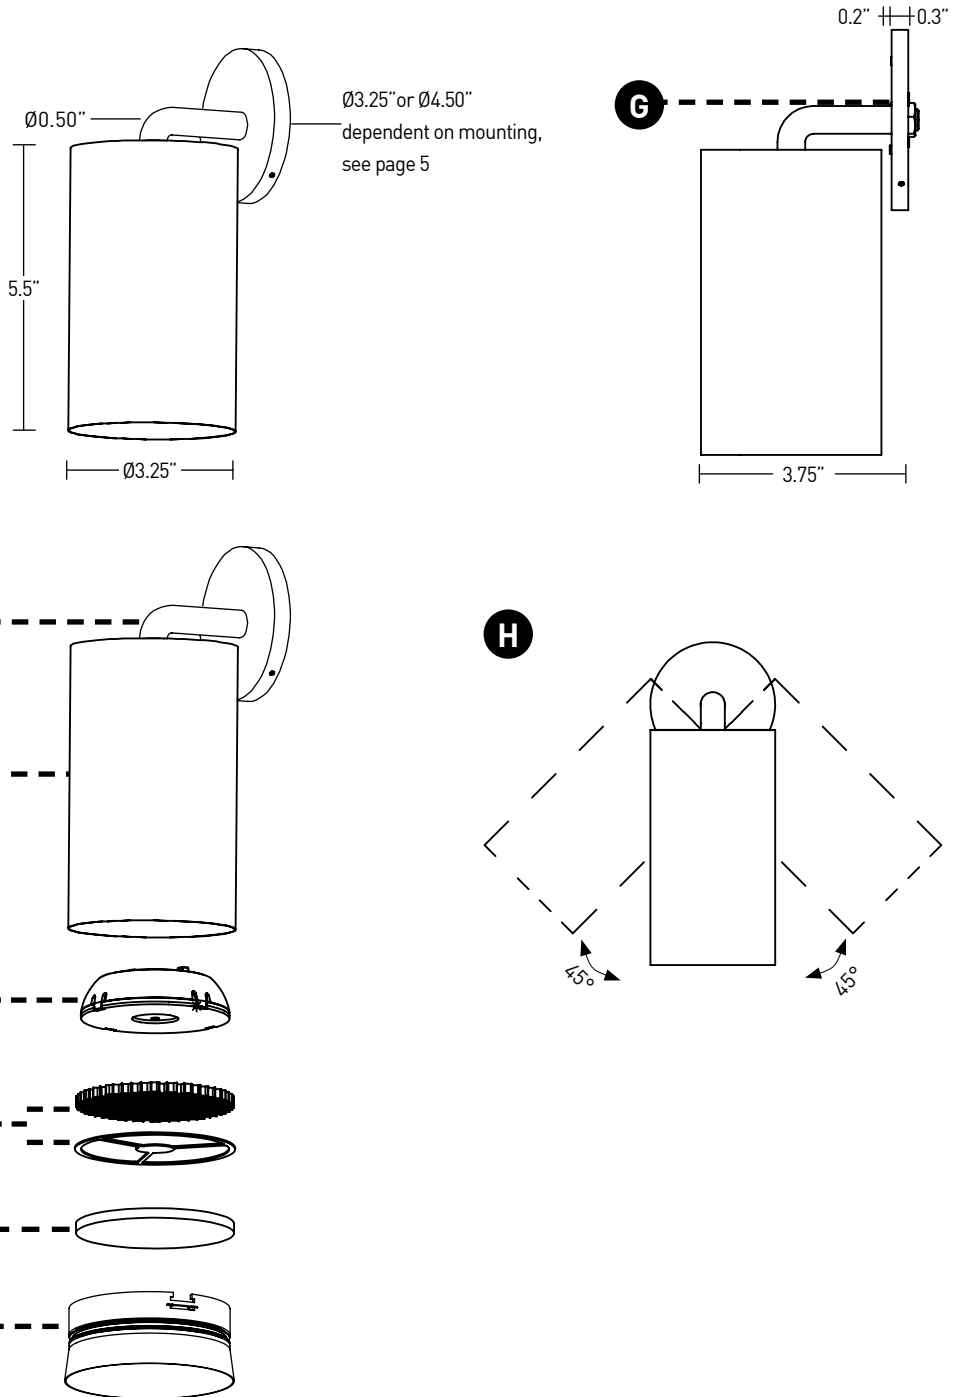

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

MOUNTING

I JUNCTION BOX MOUNTING PLATE

Mounting plate (concealed) for standard 4" square or 4" 4/0 j-box . To be installed during rough-in, prior to substrate, for ceiling thicknesses up to 0.75". Fixture to mount flush with minimalist transition to ceiling.

Part Number - CM1WM-JBMP.

J REMODEL / FLANGE OVERLAY

Provided with oversized canopy and mounting plate for standard 4" 4/0 junction boxes. Ideal for existing applications and features oversized 4.5" canopy to cover standard 4" octagon box cutout.

REMOTE POWER SUPPLY

- K Remote power supply provides additional driver options. See page 7 for maximum allowable wiring distance. Must be installed in an accessible location.

Note: Not included with fixtures designated as LVS.




L ATHENA / CASAMBI CONTROL

Controls integrated into remote driver assembly. All equipment is serviceable.

Athena Model Numbers: A-WN-D01-RF-BL & DFC-OEM-DBI

Casambi Model Number: BT-S1E1-5400

DIMENSIONS / DRAWINGS

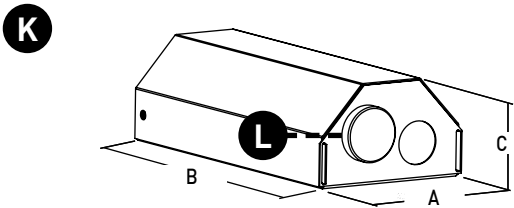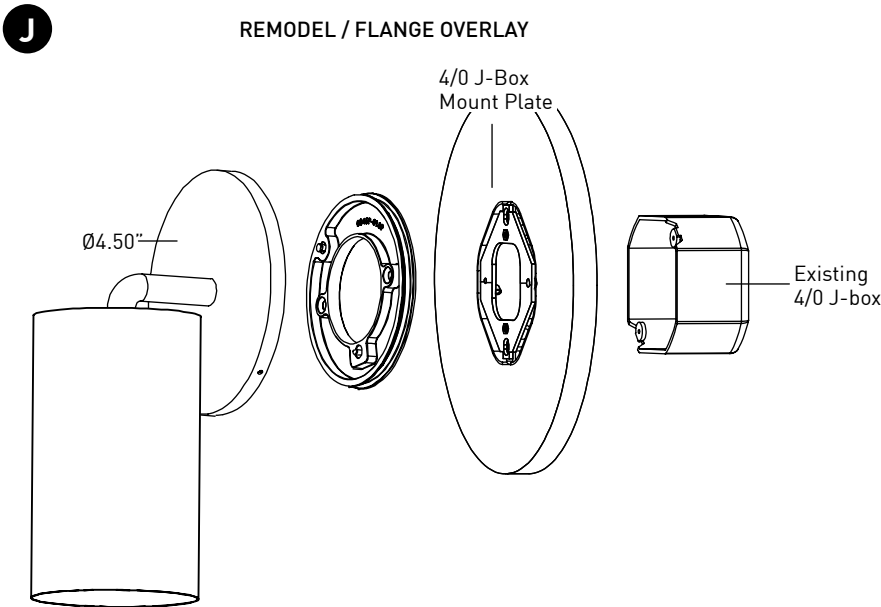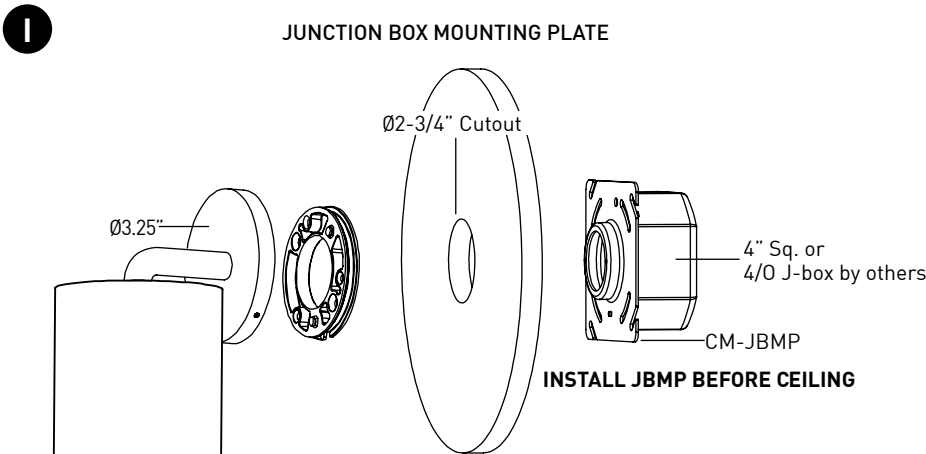

POWER SUPPLY DIMENSIONS			
Model	A	B	C
ALL OTHER DRIVERS	3.35"	6.94"	2.00"
AD1, DD2, DG1, MX2	5.00"	8.10"	2.00"

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

DISTRIBUTED POWER ACCESSORY

DIMENSIONS / DRAWINGS

M HUB (SEPARATE COMPONENTS)


Included with "HUB" driver selection. Allows for multi-fixture power distribution from one remote power supply to a maximum of 6 fixtures. Connectable fixture quantity is specified in fixture part number on page 2. HUB base plate allows for structural mounting and wiring during rough-in. Wiring distances for HUB based on quantity featured in figure K.

Model Number e.g.: HUB2X15W-PH1

N BUD (COMBINED ASSEMBLY)

Included with "BUD" driver selection. Allows for multi-fixture power distribution from combined remote power distribution assembly to a maximum of 6 fixtures. Connectable fixture quantity is specified in fixture part number on page 2. BUD base plate allows for structural mounting and wiring during rough-in. Wiring distances for BUD based on quantity featured in figure J.


Model Number e.g.: BUD4X11W-SG5

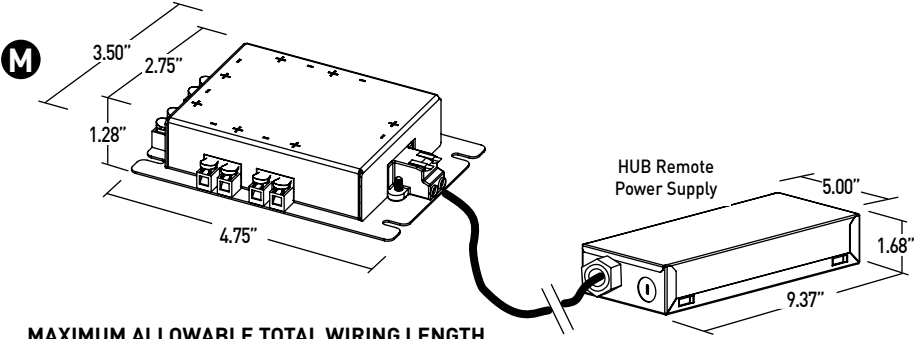

MAXIMUM ALLOWABLE TOTAL WIRING LENGTH

DRIVER-TO-HUB AWG	HUB-TO-FIXTURE AWG	TOTAL LENGTH
18	18	150'
16	16	200'
14	14	250'
12	18	400'*
12	16	450'*
12	14	500'*

*Total length requires 250' 12AWG Driver-to-Hub wiring

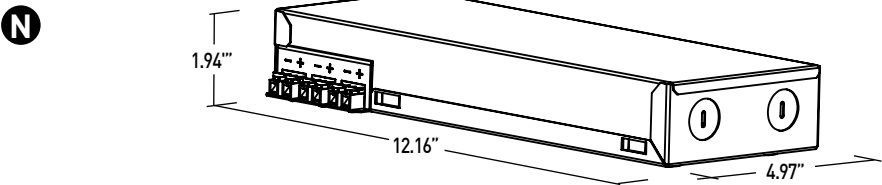


MAXIMUM ALLOWABLE TOTAL WIRING LENGTH


BUD-TO-FIXTURE AWG	TOTAL LENGTH
18	150'
16	200'
14	250'

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

HUB WIRING DETAILS

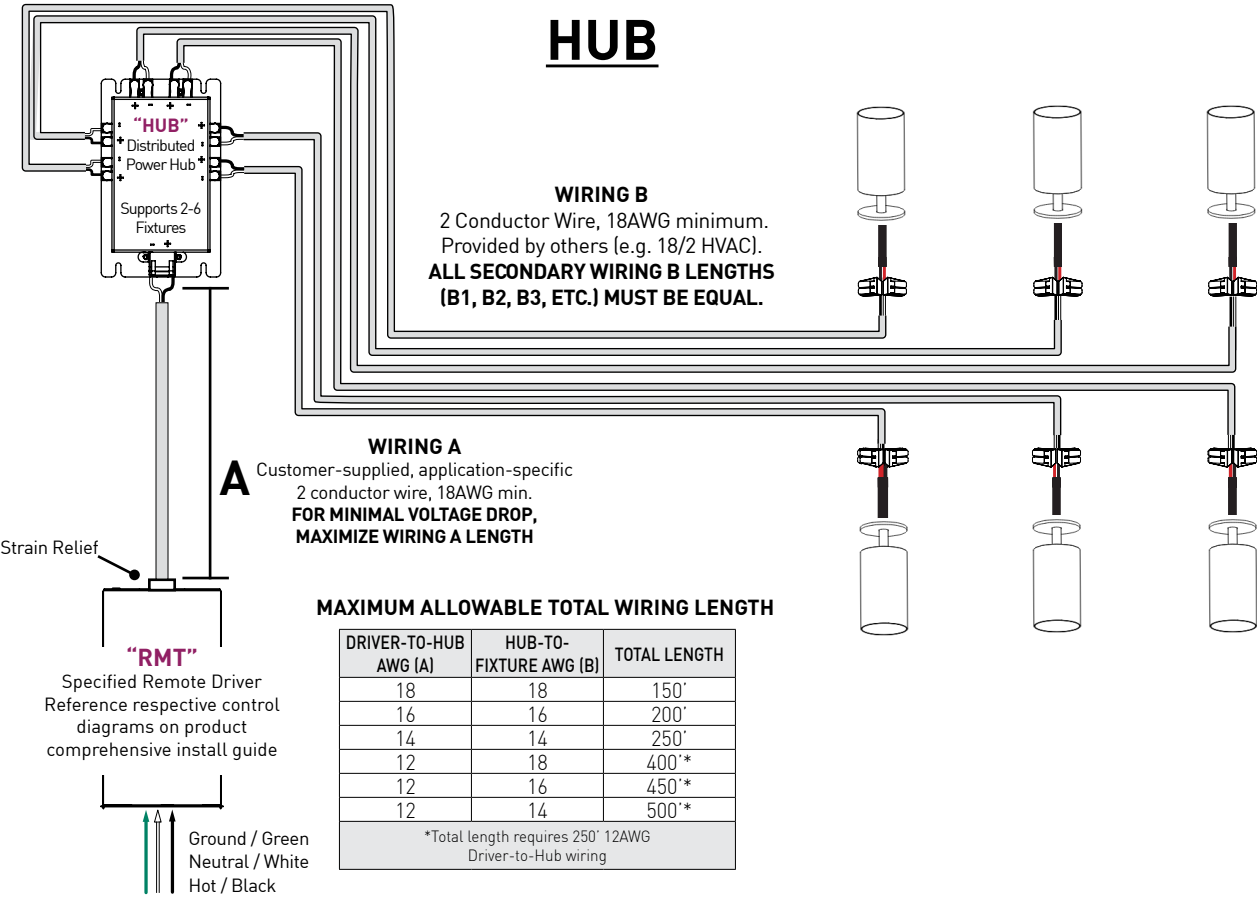

HUB WIRING DETAILS

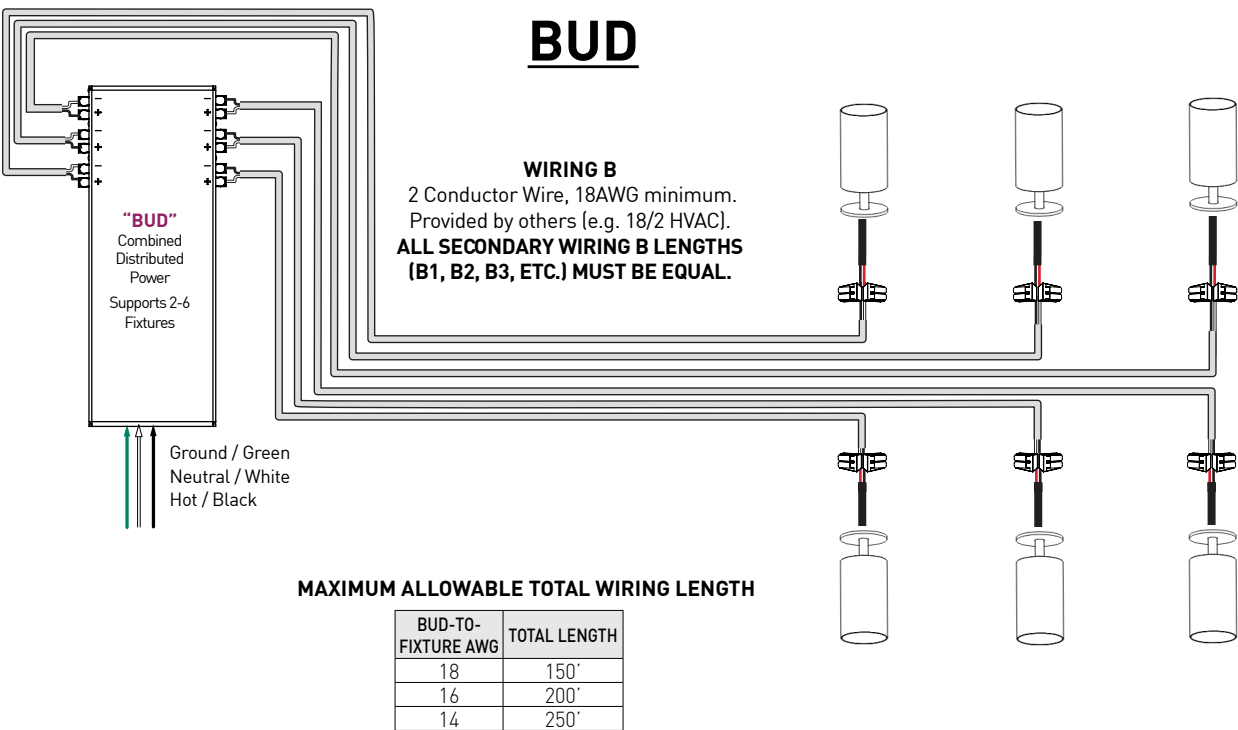

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

LOW VOLTAGE SYSTEM (LVS) SPECIFICATION NOTES

- Customers are responsible for ensuring power supply drive current is set to correct values shown below in the drive current specifics section.
- Customers must ensure voltage range of the proposed power supply encompasses the fixtures complete Vf range, both maximum and minimum, and can be set to the required mA drive current. If assistance is required contact your manufacturers representative or the factory.
- Lucifer Lighting is not responsible for confirming dimming compatability between power supplies and control systems / dimmers.
- Lucifer Lighting will not ship fixtures with a power supply supplied by others inside the fixture.
- Consult power supply manufacturer for maximum remote wiring distances.
- Housing and Fixture feature 18 AWG wiring.
- Wiring connections are made in the splicing compartment using customer supplied connectors, ex. wire nuts, push-in connectors, or terminal blocks.
- LVS Housings and Fixtures supplied by Lucifer Lighting are UL 2108 Listed.

DRIVE CURRENT SPECIFICS

	80S / 90S / 97S			90W	90T
	11A	17A	28B	17A	28B
Minimum Vf	31	31	31	31	31
Maximum Vf	36	36	36	37	37
Current mA	250	400	650	400	650
Wattage W	8.4	13.5	21.8	13.4	21.4

MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

TECHNICAL

CONSTRUCTION

Monopoint: Machined aluminum body; painted finishes are granulated powder coat; Alumina finishes are anodized aluminum.

Remote Power Supply: 22 Gauge galvanized steel.

Appliqué: Machined Aluminum

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K.

3-step MacAdam ellipse LED module available in 90+ CRI configurations in color temperature of 2400K. Average rated lamp life of 50,000 hours.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours.

TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life of 50,000 hours.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE			ECO				0-10V				DALI-2		DMX		ATHENA	
Power Supply	CE3/RE3	LH1	LP1	CA3/RA3	SG3	EG1	DG1	ED1	DD2	LX1	MX2	AS1	AD1				
Minimum °C	-20 °C	0 °C	0 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-40 °C	-20 °C	-20 °C				
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C				
Dimming %	2.0%	1.0%	0.1%	2.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%				

Note: For LH1, LP1, SG3, and EG1 drivers consult chart on page 11 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
RA3, RE3	-	164'	105'	66'	40'
LH1, LP1	60'	40'	25'	15'	-
EG1, SG3, ED1, DG1, DD2, AS1, AD1, LX1	-	-	118'	72'	46'

LISTING

cTUVus listed to UL1598 standard for Dry / Damp and IP65 Wet locations.

LVS designated fixtures are listed to UL 2108.

Title 24 JA8-2022 Listed.

NEMA 410 Compliant.

DECLARE

LBC Red List Approved.

BUY AMERICAN ACT / BUILD AMERICA BUT AMERICA

Buy American Act (BAA) and Build America Buy America (BABA) compliant.

LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years.

10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller.

[Consult website for full warranty terms and conditions.](#)

CHANGE LOG

1.03/18/2024: UPDATED 10 DEGREE NARROW BEAM TO UTILIZE FILED REDUCER.

2.07/15/2024: REMOVED L2 DRIVER OFFERING.

3.09/19/2024: UPDATED WITH NEW BAFFLE DESIGN.

4.05/07/2025: UPDATED WARM DIM OFFERING.

5.09/23/2025: DISCONTINUED EM SHUNT OFFERINGS.

6.01/02/2026: ADDED LVS OFFERING.

7.03/16/2026: ADDED HUB & BUD POWER SUPPLY

8.06/26/2026: ADDED DMX OFFERINGS.

9.06/26/2026: DISCONTINUED 0-10V LINEAR AND CASAMBI OFFERINGS.



MONOPOINT CM2 WALL MOUNT 90 DEG WET RATED

DIMMING COMPATABILITY

LUTRON DRIVER COMPATIBILITY


LH1 / LP1 Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- E (wireless) QSGR- E
Quantum Hub	QP2-__ 2C
Quantum Hub	QP2-__ 4C
Quantum Hub	QP2-__ 6C
Quantum Hub	QP2-__ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	



eldoLED DRIVER COMPATIBILITY

SG3, EG1 Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX

ANALOG DRIVERS AND DIMMERS

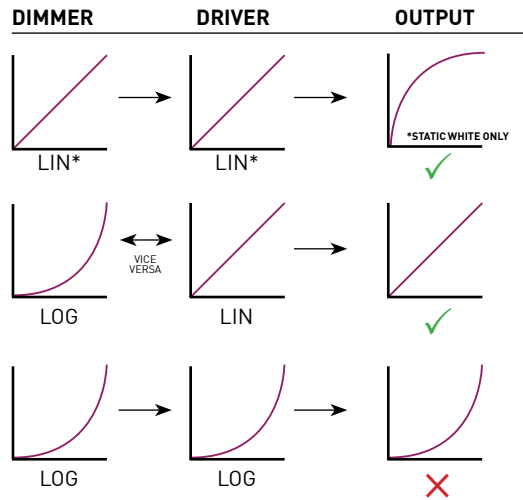

LIN = LINEAR
LOG = LOGARITHMIC
*LIN-TO-LIN NOT COMPATIBLE FOR WARM-DIM

DMX DIMMING INFORMATION

- Fixtures do not ship pre-addressed; fixture addressing is completed by the installer or a commissioning contractor via RDM.
- All fixtures are RDM compatible.
- DMX Channel Count:
Static White / Warm Dim: 1
Tunable White: 2; Channel 1 Warm and Channel 2 Cool
- DMX run termination provided by others.
- DMX Connection Type: Pigtail
- DMX Color Scheme:
DMX+: Yellow
DMX-: Pink
DMX Shield: Orange
- Installation may require shielded cable if EMI is present.
- Fixture Default Mode: FULL ON
- Fixture Fail Mode: ON 10% DIMMED